




1890 Swarthmore Avenue, PO Box 2020, Lakewood, NJ 08701
Phone: 800-526-3694, 732-363-4700, Fax: 732-364-8110
www.encoreplumbing.com • www.componenthardware.com

PROJECT NAME: _____
LOCATION: _____
SPECIFIER ITEM NO. _____ **QTY:** _____
ENCORE PART NO. _____

Encore® Single Wall Mount Faucet with 18" Double Jointed Tubular Spout and Metering Valve

KL70-9218

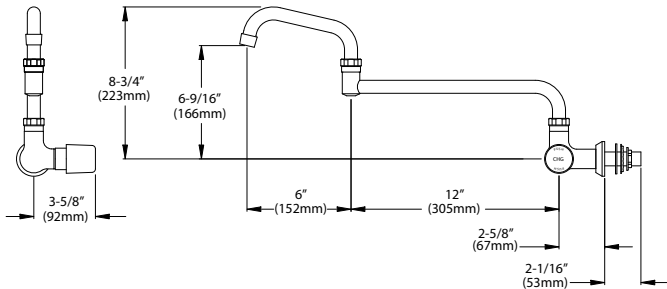

*Dimensions shown in inches (mm) are for reference only
and are subject to change.*

1-1/8" (29mm) hole for wall is recommended to
accommodate 1/2" supply nipple.

Operating Temperature: 40-180°F (5-83°C)

Operating Pressure: 15-125psi

Approximate shipping weight - 5 lbs

Warranty - 2 years parts

Solid heavy duty cast body is specification and commercial quality

Commercial Quality Features

- 18" (457mm) double jointed tubular spout design
- ADA-compliant single metering handle
- Stainless steel spout

SANIGUARD® Product Protection

- Permanently incorporated on all touch points of Encore plumbing fixtures
- Inorganic, silver ion technology inhibits growth of common bacteria, yeasts, mold and fungi, minimizes cross-contamination

SPECIFICATIONS:

Wall Mount Faucet to be Encore KL70-9218 in the following configuration. Faucet body to be constructed of polished chrome plated brass with total lead content less than 0.25% by weighted average. Single lever metering handle to be incorporated with SANIGUARD treatment. Spout to be 18" stainless steel double jointed tubular style. 2.2gpm aerator @ 60psi. Mounting hardware to be included.

COMPLIES WITH:

ASME A112.18.1-2005
CSA B125.1-05
NSF/ANSI 61/9, ANNEX G
SECTION 116875 OF THE
CALIFORNIA HEALTH & SAFETY CODE
(COMMONLY KNOWN AS AB1953)
VERMONT ACT 193
UNIFORM PLUMBING CODE

