

# BACK BAR EQUIPMENT

## Model: **KC90SNSS**

Natural Refrigerant R-290 Model

### 90" Keg Cooler - Shallow Depth

Stainless steel exterior, countertop, interior back and side panels with reinforced stainless steel floor.



## Options and Accessories

(upcharge and lead times may apply)

|                                                     |                                   |
|-----------------------------------------------------|-----------------------------------|
| Epoxy coated or stainless steel shelves             | Single, dual, or triple faucets   |
| Wine racks                                          | Tower placement (consult factory) |
| Hinged glass door(s) (consult factory)              | Faucet locks                      |
| Food storage rated stainless steel interior (NSF-7) | Casters or legs                   |
| Condensing unit on right (standard left)            | Riser base*                       |

Consult factory for other model configurations, options and accessories.

\* Adding a Riser Base increases overall height 2"

**Continental**  
Refrigerator



Project Name:

Model Specified:

Location:

Item No:

Quantity:

AIA #:

SIS #:

## Standard Model Features

### REFRIGERATION SYSTEM

Performance rated front breathing refrigeration system

Natural, environmentally safe, high efficiency R-290 refrigerant<sup>1</sup>

Automatic, hot gas condensate evaporator

Extra large, balanced evaporator coil

### CABINET ARCHITECTURE

High density, non-CFC polyurethane foamed-in-place insulation

Front, rear and side venting louvered grills

Magnetic snap in Santoprene™ door gaskets

Cylinder-keyed security lock in each door

Stainless steel reinforced threshold

### MODEL FEATURES

Low profile cabinet design

Electronic control, off cycle defrost

Continuously cooled, 3" diameter beer column with lever faucet, CO<sub>2</sub> pressure relief distributor and CO<sub>2</sub> tubing with clamps

Easily removable stainless steel drip grate with convenient front mounted cleanout drainage hose (pan not removable)

Easily accessible and serviceable condensing unit

<sup>1</sup> R-290 refrigerant meets all federal and state regulatory requirements.

APPROVAL:

## Model Specifications

### DIMENSIONAL DATA

|                                                          |                  |
|----------------------------------------------------------|------------------|
| Net Capacity (cubic feet)                                | 25 (708 l)       |
| Width, Overall (inches)                                  | 90 (2286 mm)     |
| Depth, Overall (inches)<br>(including handles & bumpers) | 25 3/16 (640 mm) |
| Depth, Body Only (inches)<br>(less doors)                | 21 (533 mm)      |
| Height, Overall (inches)<br>(not including columns)      | 34 3/4 (883 mm)  |
| Capacity: # Barrel Kegs                                  | 4                |
| Capacity: # Straight Wall Kegs                           | 4                |
| Capacity : # 1/6 Size Kegs                               | 15               |
| Number of Doors                                          | 3                |
| Number of Beer Columns<br>(with single faucets)          | 2                |

### REFRIGERANT DATA

|                             |      |
|-----------------------------|------|
| Condensing Unit Size (H.P.) | 1/3  |
| Capacity (BTU per hour)*    | 2920 |

### ELECTRICAL DATA

|                                                |                     |
|------------------------------------------------|---------------------|
| Voltage (International)                        | 115/60/1 (220/50/1) |
| Feed Wires (including ground)                  | 3                   |
| Total Amps (International)                     | 5.9 (4.9)           |
| 10 ft. Cord/Plug [attached]<br>(International) | Yes<br>(No)         |

### SHIPPING DATA

|                          |               |
|--------------------------|---------------|
| Weight (pounds)          | 425 (193 kg)  |
| Height - Crated (inches) | 46 (1168 mm)  |
| Width - Crated (inches)  | 109 (2769 mm) |
| Depth - Crated (inches)  | 42 (1067 mm)  |

\* Rating @ +25°F evaporator, 90°F ambient  
Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug  
(varies by country)

**Continental**  
Refrigerator

Toll-Free: 800-523-7138  
Phone: 215-244-1400  
Fax: 215-244-9579

539 Dunksferry Road  
Bensalem, PA 19020  
[www.continentalrefrigerator.com](http://www.continentalrefrigerator.com)


Due to our continued efforts in developing innovative products, specifications subject to change without notice.




PROUDLY  
DESIGNED & ASSEMBLED  
IN THE U.S.A.

© Copyright 2021. Continental Refrigerator.  
A Division of National Refrigeration & Air Conditioning Products, Inc.

## Model Plan Views

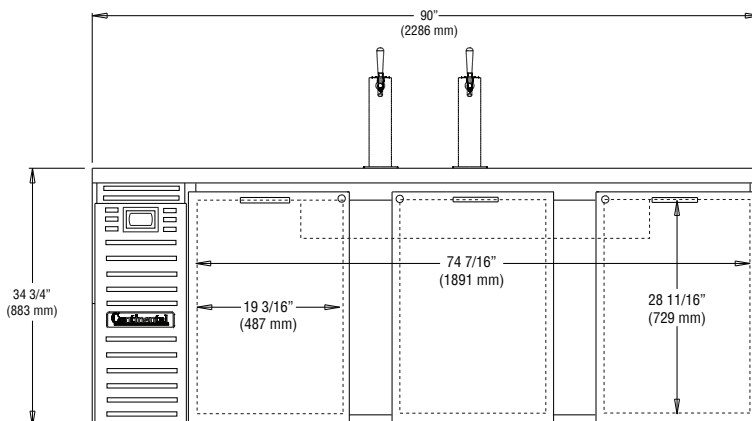

FRONT VIEW

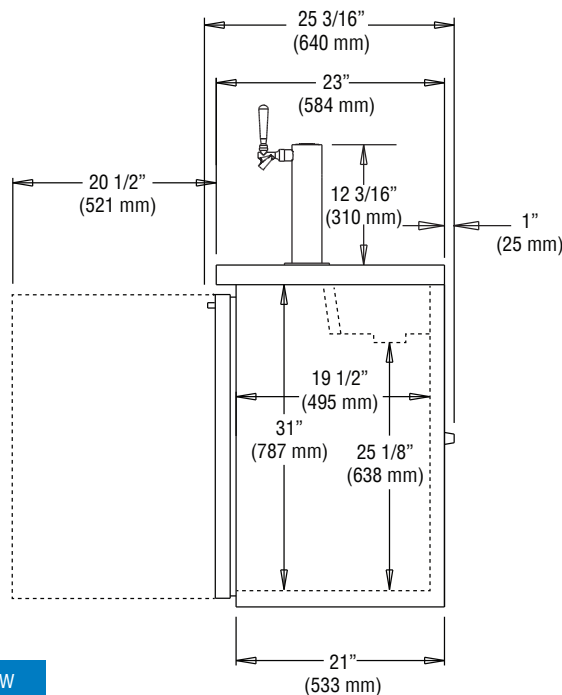

SIDE VIEW

**IMPORTANT NOTE:** Models are completely front breathing and take in and exhaust air through the front grill. For proper operation, the area in front of the cabinet **must** not be obstructed in any way. A clearance of 1" on the back and 3" on the sides is recommended.

REVISED: 2/19/25