



Reach In Refrigerators - Bottom Mount **New Size**



CR-22-SDR-HC

Height 78.00"
 Length 27.00"
 Depth 29.625"



CR-48-SDR-HC

Height 78.00"
 Length 54.37"
 Depth 29.625"

Features

- Stainless steel canopy, doors, grill
- Heavy duty hinge with self closing mechanism
- Exterior galvanized pre painted steel
- Aluminum interior
- Robust body with 2-3/8" thick walls, injected with CFC-free polyurethane
- Heavy duty epoxy coated shelves
- Electronically controlled refrigeration
- Forced air evaporator for rapid temperature "Pull Down"
- Self contained heavy duty R290 condensing unit
- 8' power cord
- Optional: Oversized handles shown above
- 4" casters
- UL Classified to ANSI/NSF 7


Model No.	Description	Voltage	Amps	Temp	HP	Est. Ship Weight
CR-22-SDR-HC	1 Solid Door / 4 Shelves	115	3.9	32°F - 41°F	1/4	318#
CR-48-SDR-HC	2 Solid Door / 4 Shelves	115	6.0	32°F - 41°F	1/3	548#






Reach In Refrigerators - Bottom Mount **New Size**

Model #	CR-22-SDR-HC	CR-47-SDR-HC
Outside Dimensions		
Depth	29.625"	29.625"
Length	27.00"	54.37"
Height	78.00"	78.00"
Door Size	27.00" x 55.06"	27.00" x 55.06"
Door Type	1 swing	2 swing
Inside Dimensions		
Depth	25.625"	25.625"
Length	22.25"	49.625"
Height	60.437"	60.437"
Shelf Size	23.125" x 24.312"	23.125" x 21.562"
# of Shelves	4	8
Capacity: Cubic Foot	20	48
Specifications		
Operating Temperature	32°F-41°F	32°F-41°F
Refrigerant	R290	R290
Compressor Size HP	1/4	1/3
Voltage	115	115
Amperage	3.9	6
Cord and Plug	yes	yes
Shipping Dimensions		
Depth	34.00"	34.00"
Length	34.00"	67.00"
Height	88.00"	88.00"
Gross Weight lbs.	318	548
Cubic feet	59	116

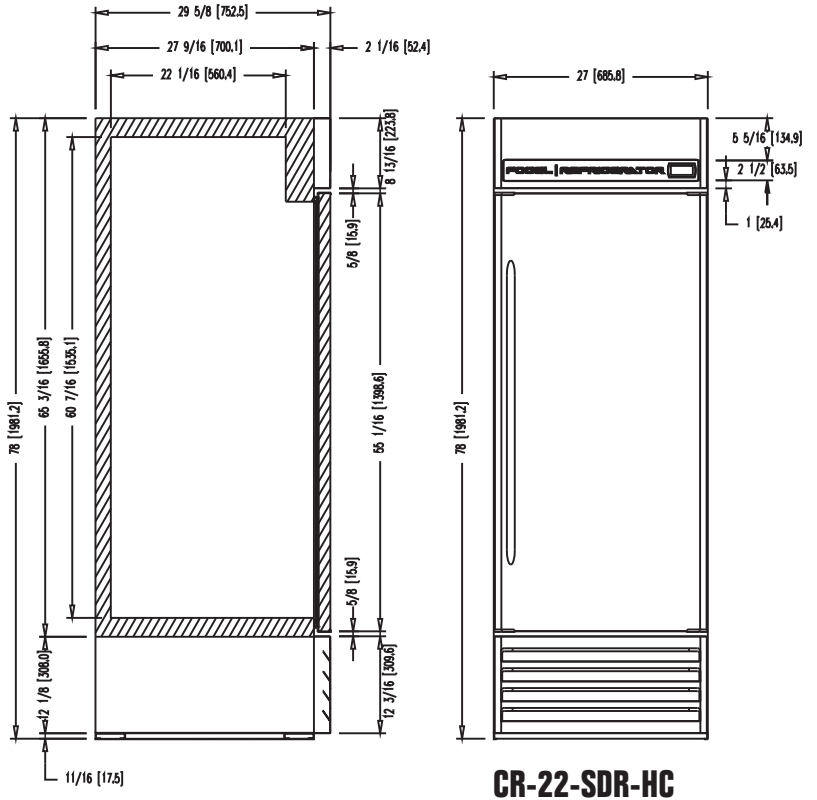

CR-22-SDR-HC

- Cases are designed to operate at 75°F and 55% relative humidity.
- Specification subject to change without notice.

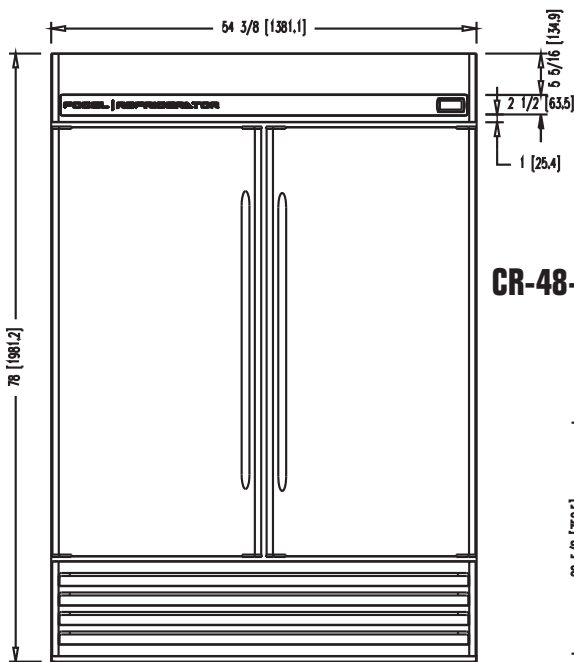

CR-48-SDR-HC

