



1890 Swarthmore Avenue, PO Box 2020, Lakewood, NJ 08701  
 Phone: 800-526-3694, 732-363-4700, Fax: 732-364-8110  
 www.toplineplumbing.com

**PROJECT NAME:** \_\_\_\_\_


**LOCATION:** \_\_\_\_\_

**SPECIFIER ITEM NO.** \_\_\_\_\_ **QTY:** \_\_\_\_\_

**TOP-LINE PART NO.** \_\_\_\_\_

**TOP-LINE® Low Lead 4" OC Wall or Back  
 Splash Mount Faucet with Straight Swing  
 Spout and Quarter Turn Ceramic Valves**  
**TLL15-41xx-SE1 Series**

- TLL15-4106-SE1 6" Straight Swing Spout
- TLL15-4108-SE1 8" Straight Swing Spout
- TLL15-4110-SE1 10" Straight Swing Spout
- TLL15-4112-SE1 12" Straight Swing Spout
- TLL15-4114-SE1 14" Straight Swing Spout
- TLL15-4116-SE1 16" Straight Swing Spout

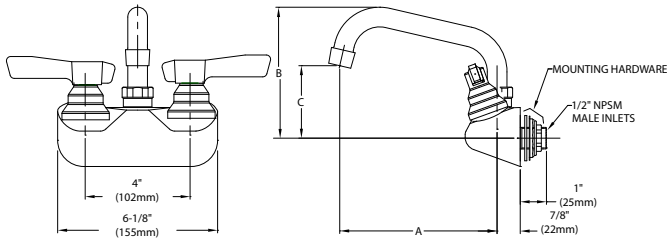

Dimensions shown in inches (mm) are for reference only and are subject to change.

1-1/8" (29mm) holes for wall are recommended to accommodate 1/2" supply nipples  
 1/2" NPSM Male Inlet  
 Operating Temperature: 40 - 180°F (5 - 83°C)  
 Operating Pressure: 15 - 125psi

Approximate shipping weight - 3 lbs  
 Warranty - 1 year

All metal construction is specification and commercial quality.

**Commercial Quality Features**

- Quarter turn ceramic valves
- Built-in check valve to prevent cross-flow and back-flow
- Stainless steel tubular swing spout design
- ADA-compliant lever handles
- Leak proof double O-ring spout design
- Gaskets and seals rated to 180°F

**SPECIFICATIONS:**

Low Lead 4" OC Wall or Back Splash Mount Faucet to be TOP-LINE TLL15-41xx-SE1 Series in the following configuration:

- \_\_\_\_\_ TLL15-4106-SE1 6" Straight Swing Spout
- \_\_\_\_\_ TLL15-4108-SE1 8" Straight Swing Spout
- \_\_\_\_\_ TLL15-4110-SE1 10" Straight Swing Spout
- \_\_\_\_\_ TLL15-4112-SE1 12" Straight Swing Spout
- \_\_\_\_\_ TLL15-4114-SE1 14" Straight Swing Spout
- \_\_\_\_\_ TLL15-4116-SE1 16" Straight Swing Spout

Faucet body to be constructed of polished chrome plated brass. Escutcheon to be polished chrome plated brass. Valves to be quarter turn ceramic type. Handles to be lever style. Supply inlets to be 4" (102mm) on center. Spout to be stainless steel straight swing style with leak proof double O-ring seal design. 2.2gpm aerator @ 60psi standard aerator.

Model No.	A	B	C
TLL15-4106-SE1	6" (152mm)	5" (127mm)	2-3/4" (70mm)
TLL15-4108-SE1	8" (203mm)	5-7/16" (139mm)	3-1/4" (82mm)
TLL15-4110-SE1	10" (254mm)	5-15/16" (150mm)	3-11/16" (94mm)
TLL15-4112-SE1	12" (305mm)	6-3/8" (162mm)	4-1/8" (105mm)
TLL15-4114-SE1	14" (356mm)	6-13/16" (174mm)	4-5/8" (117mm)
TLL15-4116-SE1	16" (406mm)	7-5/16" (185mm)	5-1/16" (129mm)

