

TOP-LINE®

1890 Swarthmore Avenue, PO Box 2020, Lakewood, NJ 08701
 Phone: 800-526-3694, 732-363-4700, Fax: 732-364-8110
 www.encoreplumbing.com • www.componenthardware.com

PROJECT NAME: _____

LOCATION: _____


SPECIFIER ITEM NO. _____ **QTY:** _____

TOP-LINE PART NO. _____

TOP-LINE® Deck Mount Double Pantry
 Faucet with Swivel Gooseneck Spout and
 Lever Handles

TLL50-900x Series

- TLL50-9000 3" Swivel Gooseneck Spout
- TLL50-9001 8" Swivel Gooseneck Spout
- TLL50-9002 6" Swivel Gooseneck Spout

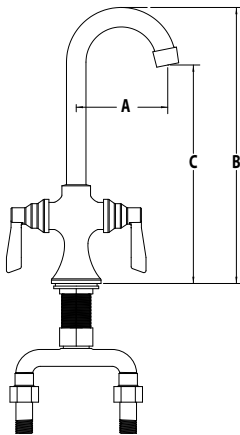

Dimensions shown in inches (mm) are for reference only
 and are subject to change.

1/2" NPSM Male Inlets with
 1-1/4" (32mm) hole for double pantry is recommended.
 Operating Temperature: 40-180°F (5-83°C)
 Operating Pressure: 15-125psi

Approximate shipping weight - 7 lbs
 Warranty - 2 years parts

Solid heavy duty cast brass body is specific and commercial quality

Commercial Quality Features

- Swivel gooseneck spout design
- ADA-compliant lever handles
- Leak proof double O-ring spout design
- Stainless steel spout

SPECIFICATIONS:

Deck Mount Double Pantry Faucet to be TOP-LINE TLL50 Series
 in the following configuration:

- _____ TLL50-9000 3" Swivel Gooseneck Spout
- _____ TLL50-9001 8" Swivel Gooseneck Spout
- _____ TLL50-9002 6" Swivel Gooseneck Spout

Faucet body to be constructed of polished chrome plated brass with total
 lead content less than 0.25% by weighted average. Supply inlets to be 4"
 on center. Valve to be full turn compression type. Spout to be stainless
 steel swivel gooseneck style with leak proof double O-ring seal design.
 2.2gpm aerator @ 60psi standard aerator. Levers handle to be color
 coded HOT or COLD.

Model No.	A	B	C
TLL50-9000	3-1/2" (89mm)	10-5/8" (270mm)	8-3/8" (213mm)
TLL50-9001	8-1/2" (216mm)	14-3/8" (365mm)	8-5/8" (219mm)
TLL50-9002	6" (152mm)	11-3/4" (289mm)	8" (203mm)

COMPLIES WITH:
 THE FEDERAL "REDUCTION OF LEAD
 IN DRINKING WATER ACT" –
 2011 – US SENATE BILL NO. S.3874
 NSF/ANSI 61/9, ANNEX G

