

PROJECT NAME: _____

LOCATION: _____

SPECIFIER ITEM NO. _____ **QTY:** _____

ENCORE PART NO. _____

Encore[®] Single Hole Double Pantry Deck Mount Pre-Rinse Assembly with Ceramic Valves and PowerPulse[™] Spray Valve

KLP50-11Lx-xx Series

Model	Flow Rate	Valves	Spring	Wall Bracket
KLP50-11L1	0.45gpm	Ceramic	Chrome Plated	None
KLP50-11L2	0.67gpm			
KLP50-11L3	0.74gpm			
KLP50-11L4	1.05gpm			
KLP50-11L5	1.22gpm			
KLP50-11L6	1.52gpm			

KLP50-11L1-S	0.45gpm	Ceramic	Stainless Steel	None
KLP50-11L2-S	0.67gpm			
KLP50-11L3-S	0.74gpm			
KLP50-11L4-S	1.05gpm			
KLP50-11L5-S	1.22gpm			
KLP50-11L6-S	1.52gpm			

KLP50-11L1-BR	0.45gpm	Ceramic	Chrome Plated	Yes
KLP50-11L2-BR	0.67gpm			
KLP50-11L3-BR	0.74gpm			
KLP50-11L4-BR	1.05gpm			
KLP50-11L5-BR	1.22gpm			
KLP50-11L6-BR	1.52gpm			

KLP50-11L1-BS	0.45gpm	Ceramic	Stainless Steel	Yes
KLP50-11L2-BS	0.67gpm			
KLP50-11L3-BS	0.74gpm			
KLP50-11L4-BS	1.05gpm			
KLP50-11L5-BS	1.22gpm			
KLP50-11L6-BS	1.52gpm			



Heavy duty pre-rinse assembly designed to withstand the demands of commercial operations.

PowerPulse Spray Valve

- Available in .45, .67, .74, 1.05, 1.22, 1.52 GPM rated flow rates
- Faster clean time - as low as 12 seconds
- Reduces water consumption by up to 58%
- Patent pending

Encore Premium Hose Feature

- 3-ply nylon reinforced Santoprene[®] inner hose provides maximum durability
- Interlocking helical coils of stainless steel outer hose shroud protect inner hose
- Patented stainless steel strain relief spring transfers and distributes load stress to significantly improve hose life
- High pressure hydraulic fittings on hose ends tested to 400psi
- Washerless design incorporates temperature resistant O-rings to provide leak-proof seal on all hose assemblies and hose grips

Kool Grip[™] Hose Grip

- Reduces heat transfer to the hand; stays up to 30 degrees cooler than competitors' grips
- Ergonomic spray handle fits comfortably in even small hands and is easy to use

Approximate shipping weight - 13 lb
Warranty - 3 years parts

COMPLIES WITH:
THE FEDERAL "REDUCTION OF LEAD
IN DRINKING WATER ACT" -
2011 - US SENATE BILL NO. S.3874
NSF/ANSI 61/9, ANNEX G




KLP50-11Lx-xx Series

Single Hole Double Pantry Deck Mount Pre-Rinse Assembly

PREMIUM PLUMBING PRODUCTS
Encore[®]

1890 Swarthmore Avenue, PO Box 2020, Lakewood, NJ 08701
Phone: 800-526-3694, 732-363-4700, Fax: 732-364-8110
www.encoreplumbing.com • www.componenthardware.com

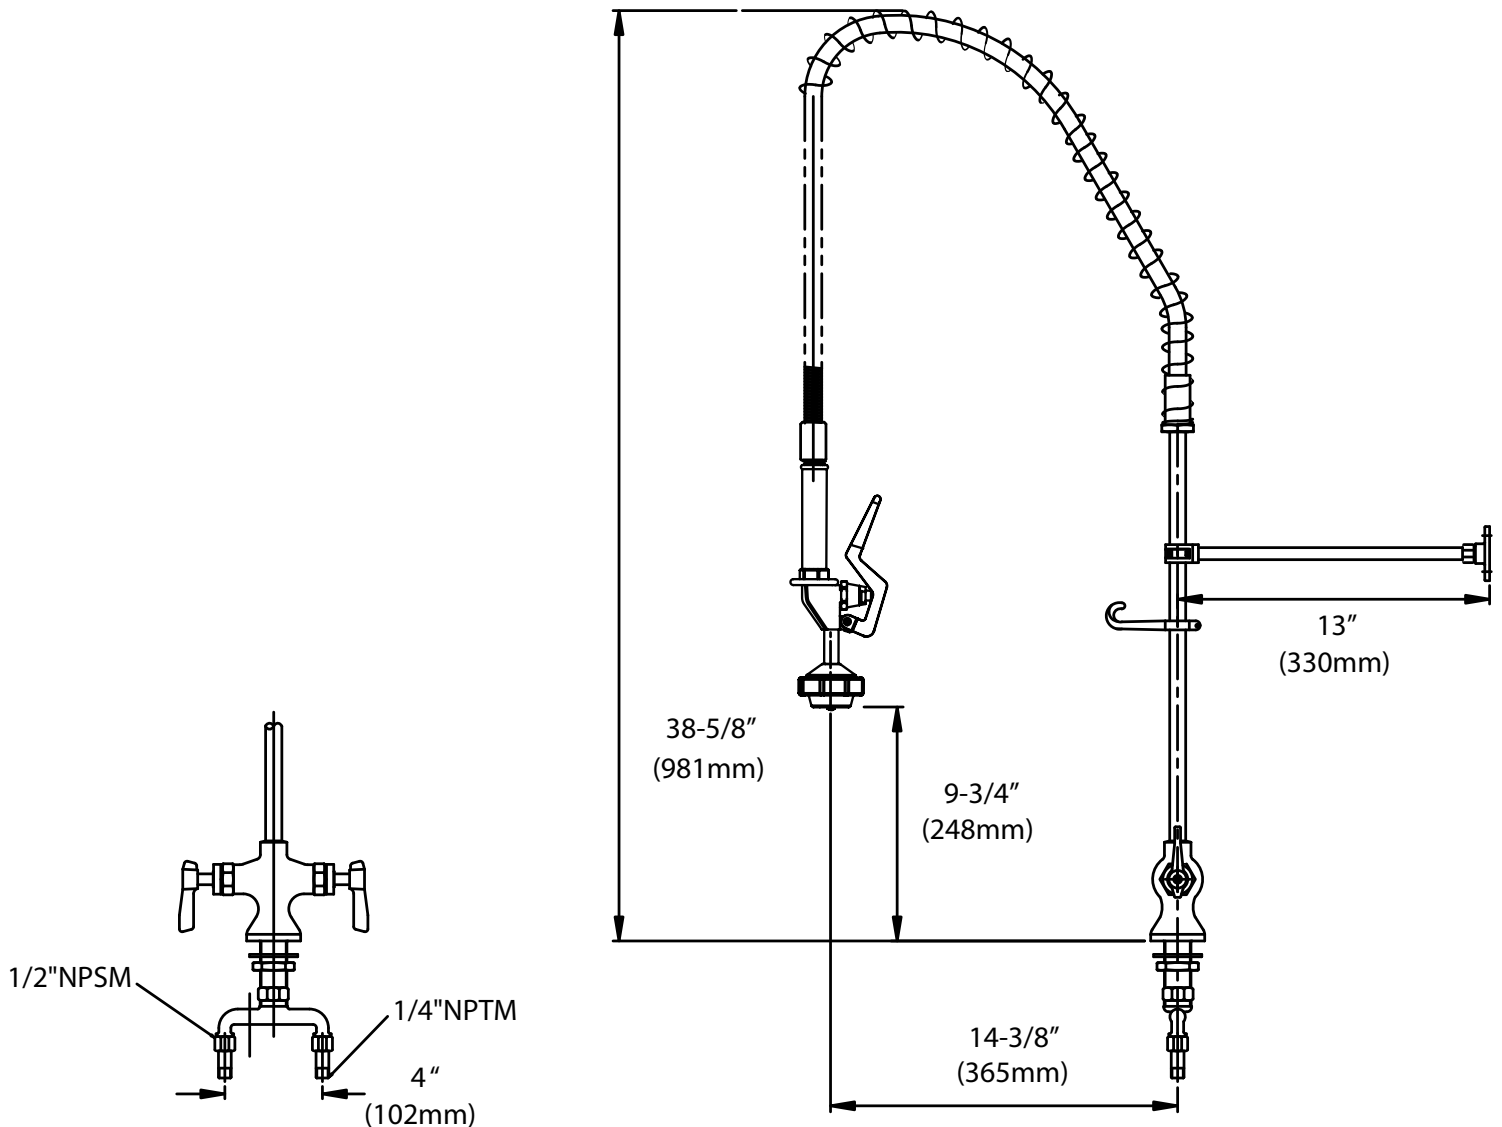

1-1/2" (29mm) hole for deck is recommended to accommodate 1/2" supply nipples.

1/2" NPSM Male Inlets

Operating Temperature: 40 -180°F (5 - 83°C)

Operating Pressure: 15 - 125psi

SPECIFICATIONS:

Deck Mount Pre-Rinse Assembly to be Encore KLP50-11Lx-xx Series Model_____.

Pre-rinse body to be constructed of polished chrome plated brass. Pre-rinse hose to be constructed of 3-ply nylon reinforced Santoprene[®] permanently secured with high pressure hydraulic fittings pressure tested to 400 psi. Hose to be of washerless, leak-proof design, protected by interlocking helical stainless steel coils for maximum protection and flexibility. Patented stainless steel strain relief spring transfers load stress. Heavy-duty ergonomic gooseneck spring ensures proper hose position. Riser to include spray head hook to hold spray head away from work area when not in use. Spray assembly to be equipped with Kool Grip[™] handle to reduce heat transfer to hand and PowerPulse spray valve for reduced water consumption and improved cleaning time.

Dimensions shown in inches (mm) are for reference only and are subject to change.