

PROJECT NAME: _____

LOCATION: _____

SPECIFIER ITEM NO. _____ **QTY:** _____

ENCORE PART NO. _____

Encore[®] Low Lead Wall Mount Pre-Rinse
 Assembly with Ceramic Valves and
 PowerPulse™ Spray Valve

KLP53-11Lx-xx Series

Model	Flow Rate	Valves	Spring	Wall Bracket
KLP53-11L1	0.45gpm	Ceramic	Chrome Plated	None
KLP53-11L2	0.67gpm			
KLP53-11L3	0.74gpm			
KLP53-11L4	1.05gpm			
KLP53-11L5	1.22gpm			
KLP53-11L6	1.52gpm			

KLP53-11L1-S	0.45gpm	Ceramic	Stainless Steel	None
KLP53-11L2-S	0.67gpm			
KLP53-11L3-S	0.74gpm			
KLP53-11L4-S	1.05gpm			
KLP53-11L5-S	1.22gpm			
KLP53-11L6-S	1.52gpm			

KLP53-11L1-BR	0.45gpm	Ceramic	Chrome Plated	Yes
KLP53-11L2-BR	0.67gpm			
KLP53-11L3-BR	0.74gpm			
KLP53-11L4-BR	1.05gpm			
KLP53-11L5-BR	1.22gpm			
KLP53-11L6-BR	1.52gpm			

KLP53-11L1-BS	0.45gpm	Ceramic	Stainless Steel	Yes
KLP53-11L2-BS	0.67gpm			
KLP53-11L3-BS	0.74gpm			
KLP53-11L4-BS	1.05gpm			
KLP53-11L5-BS	1.22gpm			
KLP53-11L6-BS	1.52gpm			



Heavy duty pre-rinse assembly designed to withstand the demands of commercial operations.

PowerPulse Spray Valve

- Available in .45, .67, .74, 1.05, 1.22, 1.52 GPM rated flow rates
- Faster clean time - as low as 12 seconds
- Reduces water consumption by up to 58%
- Patent pending

Encore Premium Hose Feature

- 3-ply nylon reinforced Santoprene[®] inner hose provides maximum durability
- Interlocking helical coils of stainless steel outer hose shroud protect inner hose
- Patented stainless steel strain relief spring transfers and distributes load stress to significantly improve hose life
- High pressure hydraulic fittings on hose ends tested to 400psi
- Washerless design incorporates temperature resistant O-rings to provide leak-proof seal on all hose assemblies and hose grips

Kool Grip™ Hose Grip

- Reduces heat transfer to the hand; stays up to 30 degrees cooler than competitors' grips
- Ergonomic spray handle fits comfortably in even small hands and is easy to use

Approximate shipping weight - 13 lb
 Warranty - 3 years parts


COMPLIES WITH:
 THE FEDERAL "REDUCTION OF LEAD
 IN DRINKING WATER ACT" -
 2011 - US SENATE BILL NO. S.3874
 NSF/ANSI 61/9, ANNEX G



KLP53-11Lx-xx Series Wall Mount Pre-Rinse Assembly

PREMIUM PLUMBING PRODUCTS
Encore[®]

1890 Swarthmore Avenue, PO Box 2020, Lakewood, NJ 08701
Phone: 800-526-3694, 732-363-4700, Fax: 732-364-8110
www.encoreplumbing.com • www.componenthardware.com

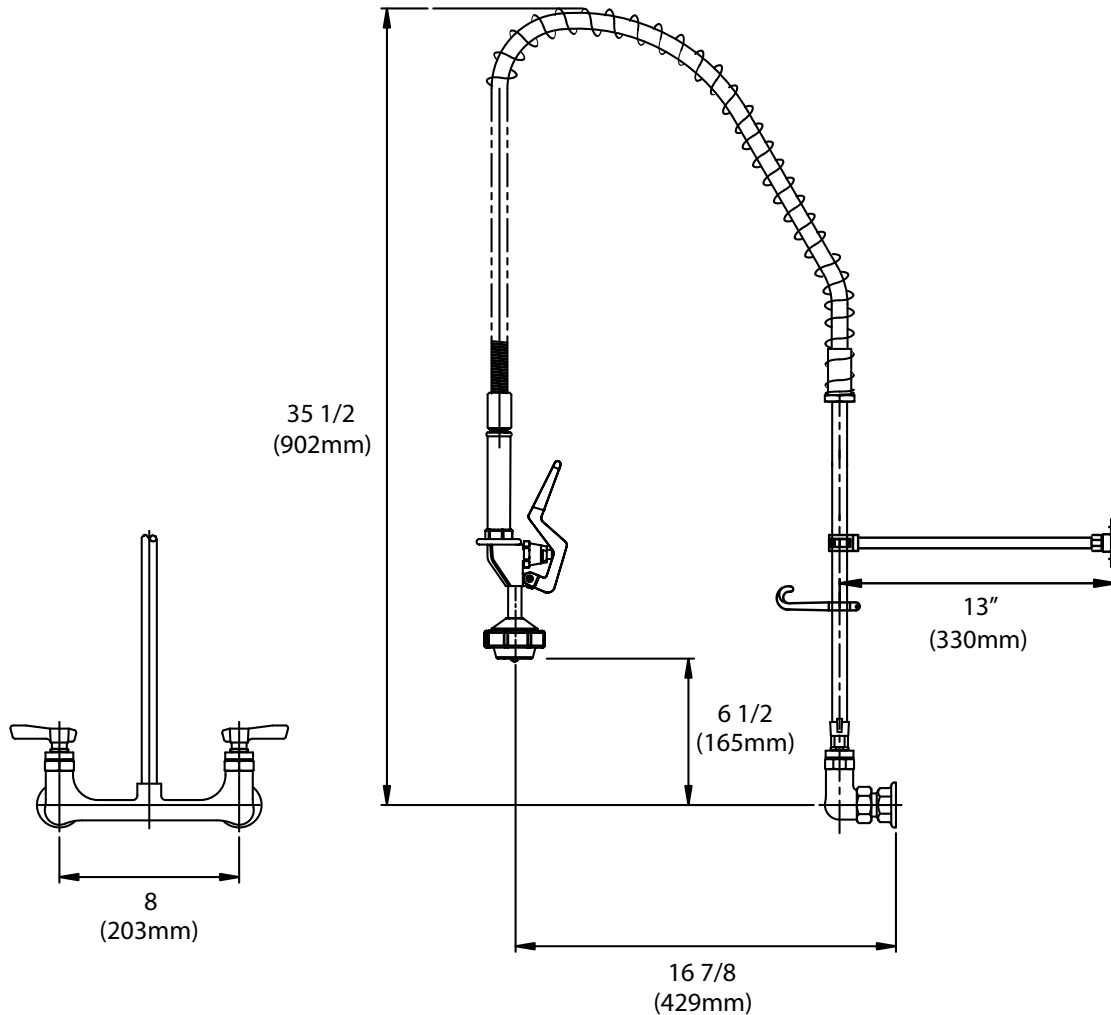

1-1/2" (29mm) holes for backsplash are recommended to accommodate 1/2" supply nipples.

1/2" NPT Female Inlets

Operating Temperature: 40 - 180°F (5 - 83°C)

Operating Pressure: 15 - 125psi

SPECIFICATIONS:

Low Lead Wall Mount Pre-Rinse Assembly to be Encore KLP53-11Lx-xx Series Model _____.

Pre-rinse body to be constructed of polished chrome plated brass. Pre-rinse hose to be constructed of 3-ply nylon reinforced Santoprene[®] permanently secured with high pressure hydraulic fittings pressure tested to 400 psi. Hose to be of washerless, leak-proof design, protected by interlocking helical stainless steel coils for maximum protection and flexibility. Patented stainless steel strain relief spring transfers load stress. Heavy-duty ergonomic gooseneck spring ensures proper hose position. Riser to include spray head hook to hold spray head away from work area when not in use. Spray assembly to be equipped with Kool Grip[™] handle to reduce heat transfer to hand and PowerPulse spray valve for reduced water consumption and improved cleaning time.

Dimensions shown in inches (mm) are for reference only and are subject to change.