

PROJECT NAME: _____


LOCATION: _____

SPECIFIER ITEM NO. _____ **QTY:** _____

ENCORE PART NO. _____

Encore[®] Wall Mount Faucet with Tubular Swing Spout, Lever Handles and Mounting Kit
KL54-8xxx-MK Series

- KL54-8106-MK 6" Spout, Ceramic Valves
- KL54-8006-MK 6" Spout, Compression Valves
- KL54-8108-MK 8" Spout, Ceramic Valves
- KL54-8008-MK 8" Spout, Compression Valves
- KL54-8110-MK 10" Spout, Ceramic Valves
- KL54-8010-MK 10" Spout, Compression Valves
- KL54-8112-MK 12" Spout, Ceramic Valves
- KL54-8012-MK 12" Spout, Compression Valves
- KL54-8114-MK 14" Spout, Ceramic Valves
- KL54-8014-MK 14" Spout, Compression Valves
- KL54-8116-MK 16" Spout, Ceramic Valves
- KL54-8016-MK 16" Spout, Compression Valves

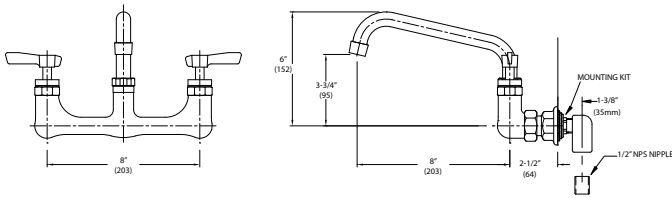

Dimensions shown in inches (mm) are for reference only and are subject to change.

1-1/2" (29mm) hole for backsplash is recommended to accommodate 1/2" supply nipples.

1/2" NPT Female Inlets
 Operating Temperature: 40 - 180°F (5 - 83°C)
 Operating Pressure: 15 - 125psi

Approximate shipping weight - 5 lbs
 Warranty - 2 years parts

Solid heavy duty cast body is specification and commercial quality

Commercial Quality Features

- Tubular swing spout design
- ADA-compliant lever handles
- Built-in check valve to prevent cross-flow and back-flow
- Leak proof double O-ring spout design
- Stainless steel spout

SPECIFICATIONS:

Wall Mount Faucet to be Encore KL54 Series in the following configuration:

- _____ KL54-8106-MK 6" Spout, Ceramic Valves
- _____ KL54-8006-MK 6" Spout, Compression Valves
- _____ KL54-8108-MK 8" Spout, Ceramic Valves
- _____ KL54-8008-MK 8" Spout, Compression Valves
- _____ KL54-8110-MK 10" Spout, Ceramic Valves
- _____ KL54-8010-MK 10" Spout, Compression Valves
- _____ KL54-8112-MK 12" Spout, Ceramic Valves
- _____ KL54-8012-MK 12" Spout, Compression Valves
- _____ KL54-8114-MK 14" Spout, Ceramic Valves
- _____ KL54-8014-MK 14" Spout, Compression Valves
- _____ KL54-8116-MK 16" Spout, Ceramic Valves
- _____ KL54-8016-MK 16" Spout, Compression Valves

Faucet body to be constructed of polished chrome plated brass. Valves to be 1/4-turn with integral check valve to prevent cross-flow and back-flow. Spout to be stainless steel tubular swing style with leak proof double O-ring seal design. Color coded temperature indexes shall meet international standards. 2.2gpm aerator @ 60psi standard with full flow stream bubbler screen spout tip. Elbow mounting kit shall be included.

Model No.	A	B	C
KL54-8106-MK	6" (152mm)	5-9/16" (141mm)	3-5/16" (84mm)
KL54-8006-MK	6" (152mm)	5-9/16" (141mm)	3-5/16" (84mm)
KL54-8108-MK	8" (203mm)	6-1/16" (154mm)	3-13/16" (96mm)
KL54-8008-MK	8" (203mm)	6-1/16" (154mm)	3-13/16" (96mm)
KL54-8110-MK	10" (254mm)	6-1/2" (165mm)	4-1/4" (108mm)
KL54-8010-MK	10" (254mm)	6-1/2" (165mm)	4-1/4" (108mm)
KL54-8112-MK	12" (305mm)	6-15/16" (176mm)	4-11/16" (120mm)
KL54-8012-MK	12" (305mm)	6-15/16" (176mm)	4-11/16" (120mm)
KL54-8114-MK	14" (355mm)	7-7/16" (187mm)	5-3/16" (131mm)
KL54-8014-MK	14" (355mm)	7-7/16" (187mm)	5-3/16" (131mm)
KL54-8116-MK	16" (406mm)	7-7/8" (200mm)	5-5/8" (143mm)
KL54-8016-MK	16" (406mm)	7-7/8" (200mm)	5-5/8" (143mm)

COMPLIES WITH:
 THE FEDERAL "REDUCTION OF LEAD
 IN DRINKING WATER ACT" -
 2011 - US SENATE BILL NO. S.3874
 NSF/ANSI 61/9, ANNEX G

