



Project \_\_\_\_\_

Item # \_\_\_\_\_

Quantity \_\_\_\_\_

# Ultra-Glo® Ceramic Dual Infrared Strip Heaters


Models:

- UGA-18D, -24D, -30D, -36D, -42D, -48D, -54D, -60D, -66D, -72D
- UGAH-18D, -24D, -30D, -36D, -42D, -48D, -54D, -60D, -66D, -72D
- UGAL-18D, -24D, -30D, -36D, -42D, -48D, -54D, -60D, -66D, -72D
- UGAHL-18D, -24D, -30D, -36D, -42D, -48D, -54D, -60D, -66D, -72D

Hatco Ultra-Glo® Ceramic Dual Strip Heaters provide the ultimate holding power. Increased height improves working clearances and the heat zone blankets the entire holding area. All models include adjustable angle brackets for mounting. Dual mounted strip heaters accommodate wider food holding areas.

## Standard features

- Increased height provided with a ceramic heat source improves operational working clearances
- Adaptable to any location and configuration, including back- or front-of-the-house use, open kitchen concepts or buffet lines
- Sturdy continuous extruded aluminum housings eliminate sagging
- Pre-focused heat pattern provides an increased pyramidal dimension, concentrating heat at the edges where heat loss is the greatest
- Available in widths from 18" to 72" (457 to 1829 mm), with or without lights
- Variety of models, configurations and colors provide unlimited flexibility
- Optional coated shatter-resistant incandescent lights enhance brilliant product display while safeguarding food from bulb breakage
- All models include adjustable angle brackets for mounting and leads with 3' (914 mm) conduit whip
- Includes either Attached Control or Remote Control Enclosure with toggle switch(es) and indicator light(s)
- All ceramic heating elements warranted against burnout for one year

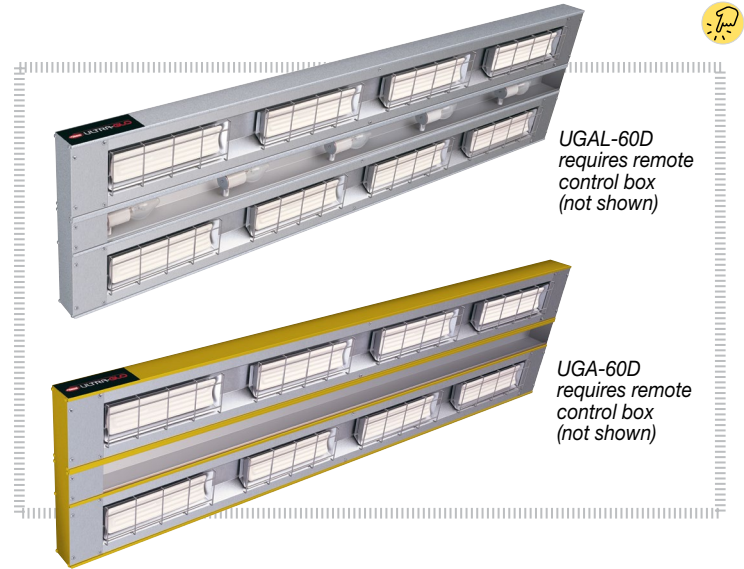

UGAL-60D requires remote control box (not shown)

UGA-60D requires remote control box (not shown)

## Options (available at time of purchase only)

- Housing - clear Anodized Aluminum finish Standard:  15"  18"
  - Designer Color or Gloss finish for Housing† - choose below
    - Warm Red  Black  Gray Granite  White Granite
    - Navy Blue  Hunter Green  Antique Copper  Radiant Red
    - Glossy Gray  Bold Black  Gleaming Gold  Brilliant Blue
- Extra Lamps - Installed (max. two per 12" (305 mm) less one) - one per 12" (305 mm) is standard
- Non-Adjustable Tubular Stands - clear Anodized Aluminum finish Standard
  - 18" (457 mm)  20" (508 mm)  22" (559 mm)
  - 24" (610 mm)  26" (660 mm) - not available for Export
  - Optional Designer Color or Gloss Finish†
    - Warm Red  Black  Gray Granite  White Granite
    - Navy Blue  Hunter Green  Antique Copper  Radiant Red
    - Glossy Gray  Bold Black  Gleaming Gold  Brilliant Blue
- Power Leads - extended beyond standard 3' (914 mm) Conduit (specify lead length)
  - 1'-5' (305-1525 mm)  6'-10' (1829-3048 mm)
  - 11'-15' (3352-4572 mm)  16'-20' (4877-6096 mm)
- Remote Box (RMB) - aluminum finish standard
  - Remote Control Enclosure with Toggle Control and Indicator (in lieu of attached control box) - choose color below if desired (not available on 240V models)
  - Remote Control Enclosure with Toggle Switch, Electronic Infinite Control, Relay and Indicator Light (in lieu of attached control box) - choose color below if desired (not available for 240V with lights)
    - Optional Designer Color or Gloss Finish for chosen Remote Box†
      - Warm Red  Black  Gray Granite  White Granite
      - Navy Blue  Hunter Green  Antique Copper  Radiant Red
      - Glossy Gray  Bold Black  Gleaming Gold  Brilliant Blue

## Accessories

- Chef LED adjustable bulb - UGA(H)L-xxD models only, pass through usage only
  - 120V  2700K Warm incandescent  3000K Warm halogen
  - 4000K Cool fluorescent
  - 230V  2700K Warm incandescent  3000K Warm halogen
  - 4000K Cool fluorescent

†Non-standard colors are non-returnable



IFS anti-microbial coatings use naturally-occurring, environmentally sustainable, silver ions to help inhibit the growth of microbes on the powder coated surface. See [www.hatcocorp.com/antimicrobial-paint](http://www.hatcocorp.com/antimicrobial-paint) for more information.



For operation, location and safety information, please refer to the Installation and Operating Manual.



For all units



For all units up to 36" (914 mm)



For all units



HATCO CORPORATION

P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. | (800) 558-0607 | (414) 671-6350



[www.hatcocorp.com](http://www.hatcocorp.com)

[support@hatcocorp.com](mailto:support@hatcocorp.com)

[Find a Hatco Rep](#)

[Image Library](#)

[Document Library](#)

[Chat](#)




# Ultra-Glo® Ceramic Dual Infrared Strip Heaters

Models: UGA(L)-18D, -24D, -30D, -36D, -42D, -48D, -54D, -60D, -66D, -72D

UGAH(L)-18D, -24D, -30D, -36D, -42D, -48D, -54D, -60D, -66D, -72D

## UGA-D, UGAL-D, UGAH-D, UGAHL-D

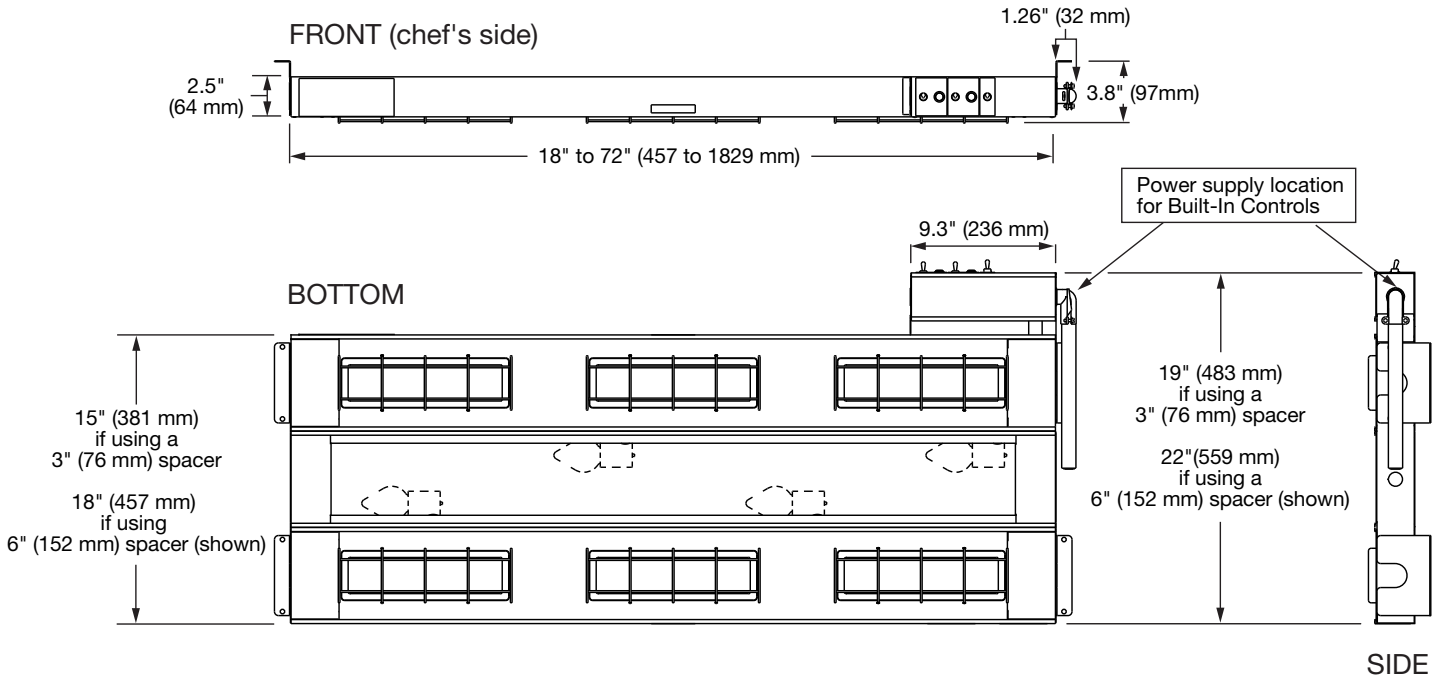

## SPECIFICATIONS Ultra-Glo® Dual Ceramic Infrared Strip Heaters

The shaded areas contain electrical information for International models

| Standard Watt |               |       |               | High Watt |               |       |      | Both             |                     |
|---------------|---------------|-------|---------------|-----------|---------------|-------|------|------------------|---------------------|
| Model         | Volts         | Watts | Amps          | Model     | Volts         | Watts | Amps | Width            | Ship Weight*        |
| UGA-18D       | 120           | 1000  | 8.3           | UGAH-18D  | 120           | 1300  | 10.8 | 18"<br>(457 mm)  | 17 lbs.<br>(8 kg.)  |
|               | 208           | 980   | 4.7           |           | 208           | 1350  | 6.5  |                  |                     |
|               | 240           | 1000  | 4.2           |           | 240           | 1300  | 5.4  |                  |                     |
|               | 220           | 1092  | 5.0           |           | 220           | 1260  | 5.7  |                  |                     |
| UGA-24D       | 120           | 1300  | 10.8          | UGAH-24D  | 120           | 1500  | 12.5 | 24"<br>(610 mm)  | 20 lbs.<br>(10 kg.) |
|               | 208           | 1350  | 6.5           |           | 208           | 1500  | 7.2  |                  |                     |
|               | 240           | 1300  | 5.4           |           | 240           | 1500  | 6.3  |                  |                     |
|               | 220           | 1260  | 5.7           |           | 220           | 1512  | 6.9  |                  |                     |
| UGA-30D       | 120           | 1500  | 12.5          | UGAH-30D  | -             | -     | -    | 30"<br>(762 mm)  | 26 lbs.<br>(12 kg.) |
|               | 208           | 1680  | 8.1           |           | 208           | 2250  | 10.8 |                  |                     |
|               | 240           | 1800  | 7.5           |           | 240           | 2250  | 9.4  |                  |                     |
|               | 220           | 1512  | 6.9           |           | 220           | 1890  | 8.6  |                  |                     |
| UGA-36D       | 208           | 1960  | 9.4           | UGAH-36D  | 208           | 2700  | 13.0 | 36"<br>(914 mm)  | 31 lbs.<br>(15 kg.) |
|               | 240           | 2000  | 8.3           |           | 240           | 2600  | 10.8 |                  |                     |
|               | 220           | 2184  | 9.9           |           | 220           | 2520  | 11.5 |                  |                     |
| UGA-42D†      | 208 circuit 1 | 1120  | 5.4           | UGAH-42D† | 208 circuit 1 | 1500  | 7.2  | 42"<br>(1067 mm) | 32 lbs.<br>(15 kg.) |
|               | circuit 2     | 1120  | 5.4           |           | circuit 2     | 1500  | 7.2  |                  |                     |
|               | 240 circuit 1 | 1200  | 5.0           |           | 240 circuit 1 | 1500  | 6.3  |                  |                     |
|               | circuit 2     | 1200  | 5.0           |           | circuit 2     | 1500  | 6.3  |                  |                     |
| UGA-48D†      | 220 circuit 1 | 1260  | 5.7           | UGAH-48D† | 220 circuit 1 | 1680  | 7.6  | 48"<br>(1219 mm) | 40 lbs.<br>(19 kg.) |
|               | circuit 2     | 1260  | 5.7           |           | circuit 2     | 1680  | 7.6  |                  |                     |
|               | 208 circuit 1 | 1470  | 7.1           |           | 208 circuit 1 | 2025  | 9.7  |                  |                     |
|               | circuit 2     | 1470  | 7.1           |           | circuit 2     | 2025  | 9.7  |                  |                     |
|               | 240 circuit 1 | 1500  | 6.3           |           | 240 circuit 1 | 1950  | 8.1  |                  |                     |
|               | circuit 2     | 1500  | 6.3           |           | circuit 2     | 1950  | 8.1  |                  |                     |
| 220 circuit 1 | 1260          | 5.7   | 220 circuit 1 | 1890      | 8.6           |       |      |                  |                     |
| circuit 2     | 1260          | 5.7   | circuit 2     | 1890      | 8.6           |       |      |                  |                     |

\* Add 2-8 lbs. (1-3 kg.) to shipping weight depending on size of remote control enclosure ordered.

† Unit with multiple circuit connections. Each circuit may require a separate circuit breaker.

continued...





# Ultra-Glo® Ceramic Dual Infrared Strip Heaters

Models: UGA(L)-18D, -24D, -30D, -36D, -42D, -48D, -54D, -60D, -66D, -72D  
 UGAH(L)-18D, -24D, -30D, -36D, -42D, -48D, -54D, -60D, -66D, -72D

SPECIFICATIONS - continued from previous page

## Ultra-Glo® Dual Ceramic Infrared Strip Heaters

The shaded areas contain electrical information for International models

| Standard Watt |               |       |      | High Watt |               |       |      | Both             |                     |
|---------------|---------------|-------|------|-----------|---------------|-------|------|------------------|---------------------|
| Model         | Volts         | Watts | Amps | Model     | Volts         | Watts | Amps | Width            | Ship Weight*        |
| UGA-54D†      | 208 circuit 1 | 1470  | 7.1  | UGAH-54D† | 208 circuit 1 | 2250  | 10.8 | 54"<br>(1372 mm) | 42 lbs.<br>(20 kg.) |
|               | circuit 2     | 1470  | 7.1  |           | circuit 2     | 2250  | 10.8 |                  |                     |
|               | 240 circuit 1 | 1500  | 6.3  |           | 240 circuit 1 | 2250  | 9.4  |                  |                     |
|               | circuit 2     | 1500  | 6.3  |           | circuit 2     | 2250  | 9.4  |                  |                     |
|               | 220 circuit 1 | 1890  | 8.6  |           | 220 circuit 1 | 2268  | 10.3 |                  |                     |
|               | circuit 2     | 1890  | 8.6  |           | circuit 2     | 2268  | 10.3 |                  |                     |
| UGA-60D†      | 208 circuit 1 | 1960  | 9.4  | UGAH-60D† | 208 circuit 1 | 2700  | 13.0 | 60"<br>(1524 mm) | 49 lbs.<br>(23 kg.) |
|               | circuit 2     | 1960  | 9.4  |           | circuit 2     | 2700  | 13.0 |                  |                     |
|               | 240 circuit 1 | 2000  | 8.3  |           | 240 circuit 1 | 2600  | 10.8 |                  |                     |
|               | circuit 2     | 2000  | 8.3  |           | circuit 2     | 2600  | 10.8 |                  |                     |
|               | 220 circuit 1 | 2184  | 9.9  |           | 220 circuit 1 | 2520  | 11.5 |                  |                     |
|               | circuit 2     | 2184  | 9.9  |           | circuit 2     | 2520  | 11.5 |                  |                     |
| UGA-66D†      | 208 circuit 1 | 1960  | 9.4  | UGAH-66D† | 208 circuit 1 | 2700  | 13.0 | 66"<br>(1676 mm) | 50 lbs.<br>(23 kg.) |
|               | circuit 2     | 1960  | 9.4  |           | circuit 2     | 2700  | 13.0 |                  |                     |
|               | 240 circuit 1 | 2000  | 8.3  |           | 240 circuit 1 | 2600  | 10.8 |                  |                     |
|               | circuit 2     | 2000  | 8.3  |           | circuit 2     | 2600  | 10.8 |                  |                     |
|               | 220 circuit 1 | 2184  | 9.9  |           | 220 circuit 1 | 2520  | 11.5 |                  |                     |
|               | circuit 2     | 2184  | 9.9  |           | circuit 2     | 2520  | 11.5 |                  |                     |
| UGA-72D†      | 208 circuit 1 | 1960  | 9.4  | UGAH-72D† | 208 circuit 1 | 3000  | 14.4 | 72"<br>(1829 mm) | 55 lbs.<br>(25 kg.) |
|               | circuit 2     | 1960  | 9.4  |           | circuit 2     | 3000  | 14.4 |                  |                     |
|               | 240 circuit 1 | 2000  | 8.3  |           | 240 circuit 1 | 3000  | 12.5 |                  |                     |
|               | circuit 2     | 2000  | 8.3  |           | circuit 2     | 3000  | 12.5 |                  |                     |
|               | 220 circuit 1 | 2520  | 11.5 |           | 220 circuit 1 | 3024  | 13.8 |                  |                     |
|               | circuit 2     | 2520  | 11.5 |           | circuit 2     | 3024  | 13.8 |                  |                     |

## SPECIFICATIONS

### Ultra-Glo® Dual Ceramic Infrared Strip Heaters with lights

The shaded areas contain electrical information for International models

| Standard Watt     |                   |                   |      | High Watt |                   |                   |            | Both            |                     |                   |                     |
|-------------------|-------------------|-------------------|------|-----------|-------------------|-------------------|------------|-----------------|---------------------|-------------------|---------------------|
| Model             | Volts             | Watts             | Amps | Model     | Volts             | Watts             | Amps       | Width           | Ship Weight*        |                   |                     |
| UGAL-18D          | 120               | 1060              | 8.8  | UGAHL-18D | 120               | 1360              | 11.3       | 18"<br>(457 mm) | 17 lbs.<br>(8 kg.)  |                   |                     |
|                   | 120/208           | 1040              | 5.2  |           | 120/208           | 1410              | 7.0        |                 |                     |                   |                     |
|                   | 120/240           | 1060              | 4.7  |           | 120/240           | 1360              | 5.9        |                 |                     |                   |                     |
|                   | 220               | 1142              | 5.2  |           | 220               | 1310              | 6.0        |                 |                     |                   |                     |
|                   | 240               | 1060              | 4.4  |           | 240               | 1360              | 5.7        |                 |                     |                   |                     |
| UGAL-24D          | 120               | 1420              | 11.8 | UGAHL-24D | 120               | 1620              | 13.5       | 24"<br>(610 mm) | 19 lbs.<br>(9 kg.)  |                   |                     |
|                   | 120/208           | 1470              | 7.5  |           | 120/208           | 1620              | 8.2        |                 |                     |                   |                     |
|                   | 120/240           | 1420              | 6.4  |           | 120/240           | 1612              | 7.3        |                 |                     |                   |                     |
|                   | 220               | 1360              | 6.2  |           | 220               | 1612              | 7.3        |                 |                     |                   |                     |
|                   | 240               | 1420              | 5.9  |           | 240               | 1620              | 6.8        |                 |                     |                   |                     |
| UGAL-30D          | 120               | 1620              | 13.5 | UGAHL-30D | -                 | -                 | -          | 30"(762 mm)     | 21 lbs.<br>(10 kg.) |                   |                     |
|                   | 120/208           | 1800              | 9.1  |           | 120/208           | 2370              | 11.8       |                 |                     |                   |                     |
|                   | 120/240           | 1920              | 8.5  |           | 120/240           | 2370              | 10.4       |                 |                     |                   |                     |
|                   | 220               | 1612              | 7.3  |           | 220               | 1990              | 9.0        |                 |                     |                   |                     |
|                   | 240               | 1920              | 8.0  |           | 240               | 2370              | 9.9        |                 |                     |                   |                     |
| UGAL-36D          | 120/208           | 2140              | 10.9 | UGAHL-36D | 120/208           | 2880              | 14.5       | 36"<br>(914 mm) | 24 lbs.<br>(11 kg.) |                   |                     |
|                   | 120/240           | 2180              | 9.8  |           | 120/240           | 2780              | 14.0       |                 |                     |                   |                     |
|                   | 220               | 2334              | 10.6 |           | 220               | 2670              | 12.1       |                 |                     |                   |                     |
|                   | 240               | 2180              | 9.1  |           | 240               | 2780              | 11.6       |                 |                     |                   |                     |
|                   | UGAL-42D†         | 120/208 circuit 1 | 208V |           | 1120              | 5.4               | UGAHL-42D† |                 |                     | 120/208 circuit 1 | 208V                |
| circuit 2         |                   | 120/208V          | 1300 | 6.9       | circuit 2         | 120/208V          |            | 1680            | 8.7                 |                   |                     |
| 120/240 circuit 1 |                   | 240V              | 1200 | 5.0       | 120/240 circuit 1 | 240V              |            | 1500            | 6.3                 |                   |                     |
| circuit 2         |                   | 120/240V          | 1380 | 5.6       | circuit 2         | 120/240V          |            | 1680            | 7.8                 |                   |                     |
| 220 circuit 1     |                   | 220V              | 1260 | 5.7       | 220 circuit 1     | 220V              |            | 1680            | 7.6                 |                   |                     |
| circuit 2         | 220V              | 1410              | 6.4  | circuit 2 | 220V              | 1830              | 8.3        |                 |                     |                   |                     |
| UGAL-48D†         | 240 circuit 1     | 240V              | 1200 | 5.0       | UGAHL-48D†        | 240 circuit 1     | 240V       | 1500            | 6.3                 | 48"<br>(1219 mm)  | 30 lbs.<br>(14 kg.) |
|                   | circuit 2         | 240V              | 1380 | 5.8       |                   | circuit 2         | 240V       | 1680            | 7.0                 |                   |                     |
|                   | 120/208 circuit 1 | 208V              | 1470 | 7.1       |                   | 120/208 circuit 1 | 208V       | 2025            | 9.7                 |                   |                     |
|                   | circuit 2         | 120/208V          | 1710 | 9.1       |                   | circuit 2         | 120/208V   | 2265            | 11.7                |                   |                     |
|                   | 120/240 circuit 1 | 240V              | 1500 | 6.3       |                   | 120/240 circuit 1 | 240V       | 1950            | 8.1                 |                   |                     |
| circuit 2         | 120/240V          | 1740              | 8.3  | circuit 2 | 120/240V          | 2190              | 10.1       |                 |                     |                   |                     |
| UGAL-48D†         | 220 circuit 1     | 220V              | 1260 | 5.7       | UGAHL-48D†        | 220 circuit 1     | 220V       | 1890            | 8.6                 |                   |                     |
|                   | circuit 2         | 220V              | 1460 | 6.6       |                   | circuit 2         | 220V       | 2090            | 9.5                 |                   |                     |
|                   | 240 circuit 1     | 240V              | 1500 | 6.3       |                   | 240 circuit 1     | 240V       | 1950            | 8.1                 |                   |                     |
|                   | circuit 2         | 240V              | 1740 | 7.3       |                   | circuit 2         | 240V       | 2190            | 9.1                 |                   |                     |

\*Add 2-8 lbs. (1-3 kg.) to shipping weight depending on size of remote control enclosure.

†Unit with multiple circuit connections. Each circuit may require a separate circuit breaker.

NOTE: UGAHL models that have multiple voltages listed, such as 120/208 or 120/240, have multiple internal circuits. For example, a 120/208V utilizes 120V for the light circuit and 208 volts for the heat circuit(s).

continued...

HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. | (800) 558-0607 | (414) 671-6350



[www.hatcocorp.com](http://www.hatcocorp.com) | [support@hatcocorp.com](mailto:support@hatcocorp.com) | [Find a Hatco Rep](#) | [Image Library](#) | [Document Library](#) | [Chat](#)



# Ultra-Glo® Ceramic Dual Infrared Strip Heaters

Models: UGA(L)-18D, -24D, -30D, -36D, -42D, -48D, -54D, -60D, -66D, -72D

UGAH(L)-18D, -24D, -30D, -36D, -42D, -48D, -54D, -60D, -66D, -72D

## SPECIFICATIONS

### Ultra-Glo® Dual Ceramic Infrared Strip Heaters with lights

The shaded areas contain electrical information for International models

| Standard Watt |                        |       |      |            | High Watt              |       |      |               | Both             |  |
|---------------|------------------------|-------|------|------------|------------------------|-------|------|---------------|------------------|--|
| Model         | Volts                  | Watts | Amps | Model      | Volts                  | Watts | Amps | Width         | Ship Weight*     |  |
| UGAL-54D†     | 120/208 circuit 1 208V | 1470  | 7.1  | UGAHL-54D† | 120/208 circuit 1 208V | 2250  | 10.8 | 54" (1372 mm) | 33 lbs. (15 kg.) |  |
|               | circuit 2 120/208V     | 1710  | 9.1  |            | circuit 2 120/208V     | 2490  | 12.8 |               |                  |  |
|               | 120/240 circuit 1 240V | 1500  | 6.3  |            | 120/240 circuit 1 240V | 2250  | 9.4  |               |                  |  |
|               | circuit 2 120/240V     | 1740  | 8.3  |            | circuit 2 120/240V     | 2490  | 11.4 |               |                  |  |
|               | 220 circuit 1 220V     | 1260  | 5.7  |            | 220 circuit 1 220V     | 2268  | 10.3 |               |                  |  |
|               | circuit 2 220V         | 1460  | 6.6  |            | circuit 2 220V         | 2468  | 11.2 |               |                  |  |
|               | 240 circuit 1 240V     | 1500  | 6.3  |            | 240 circuit 1 240V     | 2250  | 9.4  |               |                  |  |
|               | circuit 2 240V         | 1740  | 7.3  |            | circuit 2 240V         | 2490  | 10.4 |               |                  |  |
| UGAL-60D†     | 120/208 circuit 1 208V | 1960  | 9.4  | UGAHL-60D† | 120/208 circuit 1 208V | 2700  | 13.0 | 60" (1524 mm) | 37 lbs. (17 kg.) |  |
|               | circuit 2 120/208V     | 2260  | 11.9 |            | circuit 2 120/208V     | 3000  | 15.5 |               |                  |  |
|               | 120/240 circuit 1 240V | 2000  | 8.3  |            | 120/240 circuit 1 240V | 2600  | 10.8 |               |                  |  |
|               | circuit 2 120/240V     | 2300  | 10.8 |            | circuit 2 120/240V     | 2900  | 13.3 |               |                  |  |
|               | 220 circuit 1 220V     | 2184  | 9.9  |            | 220 circuit 1 220V     | 2520  | 11.5 |               |                  |  |
|               | circuit 2 220V         | 2434  | 11.1 |            | circuit 2 220V         | 2770  | 12.6 |               |                  |  |
|               | 240 circuit 1 240V     | 2000  | 8.3  |            | 240 circuit 1 240V     | 2600  | 10.8 |               |                  |  |
|               | circuit 2 240V         | 2300  | 9.6  |            | circuit 2 240V         | 2900  | 12.1 |               |                  |  |
| UGAL-66D†     | 120/208 circuit 1 208V | 1960  | 9.4  | UGAHL-66D† | 120/208 circuit 1 208V | 2700  | 13.0 | 66" (1676 mm) | 40 lbs. (18 kg.) |  |
|               | circuit 2 120/208V     | 2260  | 11.9 |            | circuit 2 120/208V     | 3000  | 15.5 |               |                  |  |
|               | 120/240 circuit 1 240V | 2000  | 8.3  |            | 120/240 circuit 1 240V | 2600  | 10.8 |               |                  |  |
|               | circuit 2 120/240V     | 2300  | 10.8 |            | circuit 2 120/240V     | 2900  | 13.3 |               |                  |  |
|               | 220 circuit 1 220V     | 2184  | 9.9  |            | 220 circuit 1 220V     | 2520  | 11.5 |               |                  |  |
|               | circuit 2 220V         | 2434  | 11.1 |            | circuit 2 220V         | 2770  | 12.6 |               |                  |  |
|               | 240 circuit 1 240V     | 2000  | 8.3  |            | 240 circuit 1 240V     | 2600  | 10.8 |               |                  |  |
|               | circuit 2 240V         | 2300  | 9.6  |            | circuit 2 240V         | 2900  | 12.1 |               |                  |  |
| UGAL-72D†     | 120/208 circuit 1 208V | 1960  | 9.4  | UGAHL-72D† | 120/208 circuit 1 208V | 3000  | 14.4 | 72" (1829 mm) | 44 lbs. (20 kg.) |  |
|               | circuit 2 120/208V     | 2320  | 12.4 |            | circuit 2 208V         | 3000  | 14.4 |               |                  |  |
|               | 120/240 circuit 1 240V | 2000  | 8.3  |            | circuit 3 120V         | 360   | 3.0  |               |                  |  |
|               | circuit 2 120/240V     | 2360  | 11.3 |            | 120/240 circuit 1 240V | 3000  | 12.5 |               |                  |  |
|               | 220 circuit 1 220V     | 2520  | 11.5 |            | circuit 2 120/240V     | 3360  | 15.5 |               |                  |  |
|               | circuit 2 220V         | 2820  | 12.8 |            | 220 circuit 1 220V     | 3024  | 13.8 |               |                  |  |
|               | 240 circuit 1 240V     | 2000  | 8.3  |            | circuit 2 220V         | 3324  | 15.1 |               |                  |  |
|               | circuit 2 240V         | 2360  | 9.8  |            | 240 circuit 1 240V     | 3000  | 12.5 |               |                  |  |
|               |                        |       |      |            | circuit 2 240V         | 3360  | 14.0 |               |                  |  |

\*Add 2-8 lbs. (1-3 kg.) to shipping weight depending on size of remote control enclosure.

†Unit with multiple circuit connections. Each circuit may require a separate circuit breaker.

NOTE: UGAHL models that have multiple voltages listed, such as 120/208 or 120/240, have multiple internal circuits. For example, a 120/208V utilizes 120V for the light circuit and 208 volts for the heat circuit(s).

## DIMENSIONS

### Dual models with Remote Control Enclosure:

18"-72"W x 15"D x 2.5"H (457-1829 x 381 x 64 mm).

### Dual models with attached Control Box:

18"-72"W x 18.8"D x 2.5"H (457-1829 x 478 x 64 mm).

### Attached Control Box:

9.29" (dual) W x 3.88"D x 2.5"H (147 or 251 x 98 x 64 mm).

▲ Add 3" (76 mm) to depth when ordering dual models with 6" (152 mm) spacer.

## MOUNTING REQUIREMENTS

Do not install Ultra-Glo® strip heaters above or around combustible surfaces. Discoloration or combustion could occur.

Ultra-Glo strip heaters must be installed in non-combustible surroundings only.

### Mounting requirements for all Ultra-Glo® Dual Element depth models

Must be mounted at least 1" (25 mm) below shelf, and 3" (76 mm) from back wall.

### Mounting height for all Ultra-Glo® Dual Element depth models

Standard Watt: 18"-22" (457-559 mm).

High Watt: 22" to 26" (559-660 mm).



Refer to Product Installation and Operating Manual for more detailed information.

## PRODUCT SPECS

### Ultra-Glo® Dual Ceramic Infrared Strip Heaters

The Dual Ceramic Infrared Strip Heater shall be an Ultra-Glo™, manufactured by the Hatco Corporation, Milwaukee, WI 53234 U.S.A.

The Foodwarmer shall be an Ultra-Glo Model ... , rated at ... watts, ... volts, single phase and be ... inches (millimeters) in overall width.

The Ultra-Glo® shall consist of an aluminum housing, ceramic heating element, 3' conduit whip and angle brackets for mounting. Remote Control Enclosure is

## REMOTE CONTROL ENCLOSURES

One Control Box per Strip Heater

| Model         | Width of Unit | Depth      | Height         | Width of Unit (with brackets) |
|---------------|---------------|------------|----------------|-------------------------------|
| RMB-3 Series  | 5.5" (140 mm) | 3" (76 mm) | 2.5" (64 mm)   | 7" (178 mm)                   |
| RMB-7 Series  | 9" (229 mm)   |            |                | 10.5" (267 mm)                |
| RMB-14 Series | 14" (356 mm)  |            |                | 15.5" (394 mm)                |
| RMB-16 Series | 16" (406 mm)  |            |                | 17.5" (445 mm)                |
| RMB-20 Series | 20" (508 mm)  |            |                | 21.5" (546 mm)                |
| RMB-22 Series | 22" (559 mm)  |            |                | 23.5" (597 mm)                |
| RMB-24 Series | 24" (610 mm)  |            | 25.5" (648 mm) |                               |

recommended. Mounting heights between 18" to 22" (457-559 mm) dual standard (low) watt, 22" to 26" (559-660 mm) dual high watt. Accessories shall include Chef LED Bulbs. Optional Designer Color and Gloss Finish in anti-microbial paint will be available for the Housing, Non-adjustable Tubular Stands and Remote Control Enclosure.

Warranty consists of 24/7 parts and service assistance (U.S. and Canada only).

HATCO CORPORATION

P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. | (800) 558-0607 | (414) 671-6350



[www.hatcocorp.com](http://www.hatcocorp.com)

[support@hatcocorp.com](mailto:support@hatcocorp.com)

[Find a Hatco Rep](#)

[Image Library](#)

[Document Library](#)

[Chat](#)