



Job _____ Item No. _____

Refrigerated Countertop Server

□ RCTS-4



RCTS-4

DESCRIPTION

The RCTS-4 is a self-contained refrigerated countertop cooler that is designed to hold toppings, condiments, and similar products at NSF-7 compliant temperatures. Its compact size and quiet operation make it a great compliment to any operation.

SPECIFICATIONS

RCTS-4 refrigerated servers will feature stainless steel exterior construction. This unit will come with four [4] 6-inch deep, 1/6 size clear, polycarbonate insets with hinged lid. The unit will feature adjustable temperature controls with digital readout and a lighted on/off rocker switch. Unit will be NSF-7 compliant while maintaining 35° F (1.7° C) product temperature. The unit will utilize a 1/6 HP compressor which uses R-134A refrigerant. The unit will run on 120 V/60 Hz. It will be supplied with four [4] rubber feet and 4 ft. (1.22 m) cordset and NEMA 5-15P plug.

WARRANTY

These units come with a one [1] year warranty for parts and labor. An optional, extended five [5] year compressor warranty can be purchased additionally.

FEATURES

- NSF-7 compliant for pans from 2-6 in. (51-152 mm) deep at 35° F (1.7° C) product temperature
- Adjustable temperature controls with digital readout to ensure product can be kept at the correct temperature for proper safety and sanitation
- Includes 4 removable 6-inch (152 mm) deep, 1/6 size clear polycarbonate insets with hinged lids
- Can accommodate a single 2/3 size inset alone, or combinations of 1/3, 1/6, and 1/9 size insets with supplied adapter bar
- Self-contained refrigeration system with 1/6-HP compressor
- Foamed in place insulation

OPTIONS & ACCESSORIES

- Stainless steel night cover [part number RCTS-4-CVR]
- Optional, extended five [5] year compressor warranty

CERTIFICATIONS




WELLS BLOOMFIELD, LLC • www.wells-mfg.com
265 Hobson Street • Smithville, Tennessee 37166
Telephone 888 356 5362 • Fax 314 781 5445

Printed in the U.S.A. • 2M-Z22418 • Rev - • 09.2017
Specifications are subject to change without notice
and are not intended for installation purposes.



Refrigerated Countertop Server

□ RCTS-4

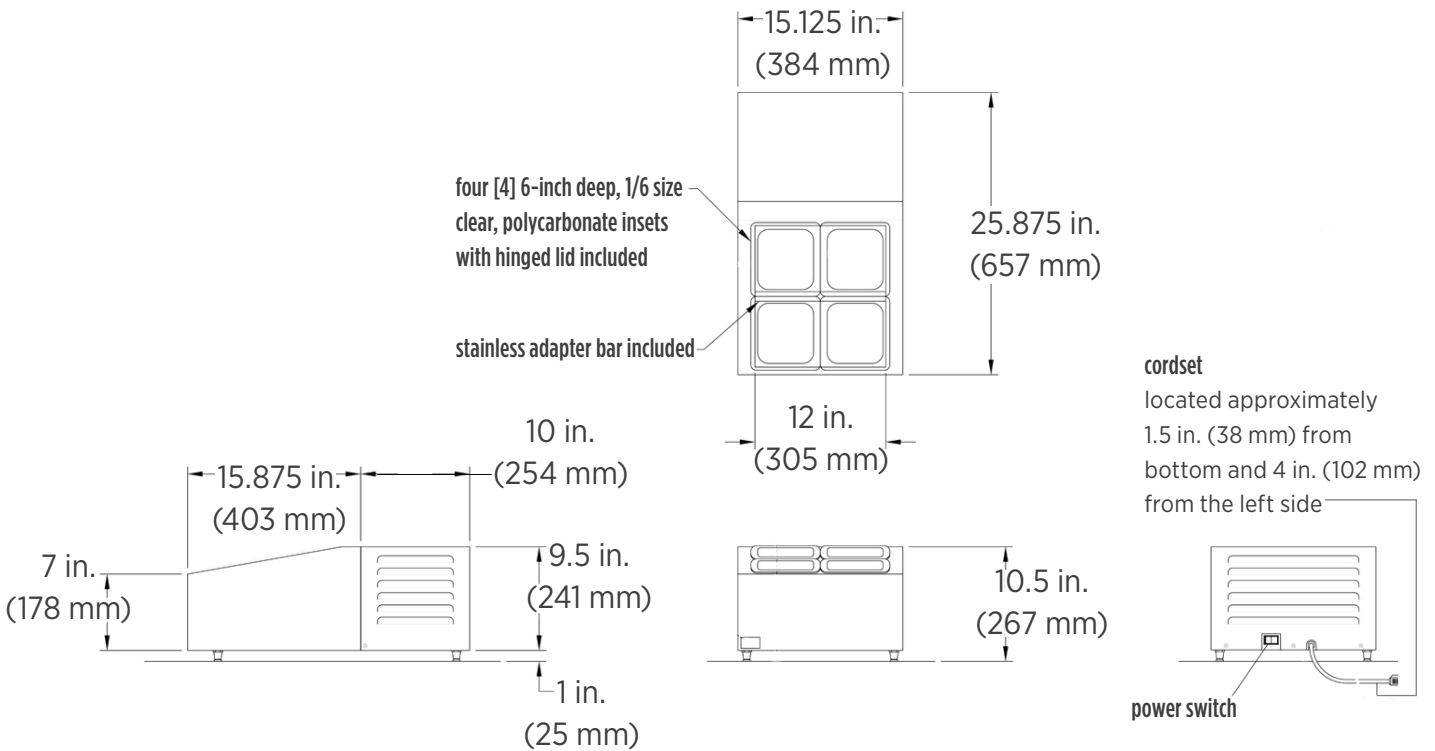

CLEARANCES

These units can be installed on non-combustible countertops using the provided feet.

The bottom, back, and both sides must be at least one [1] inch (25 mm) from any combustible surface.

MODEL	OPENING SIZE in. (mm)	HEIGHT in. (mm)	WIDTH in. (mm)	DEPTH in. (mm)	VOLTS	COMPRESSOR HP	AMPS	WATTS	NEMA PLUG	APPROX. SHIP WEIGHT	APPROX. INSTALLED WEIGHT
RCTS-4	12 x 12 (305 x 305)	10.5 (267)	15.125 (384)	25.875 (657)	120	1/6	2	240	5-15P	70 lb. (33.6 kg)	60 lb. (27.2 kg)



5-15P

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While Star Manufacturing exercises good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.



WELLS BLOOMFIELD, LLC • www.wells-mfg.com
 265 Hobson Street • Smithville, Tennessee 37166
 Telephone 888 356 5362 • Fax 314 781 5445

Printed in the U.S.A. • 2M-Z22418 • Rev - • 09.2017
 Please refer to the owner's manual for information regarding installation or use.