




Item # _____

Job _____

METRO® MOBILE END LOAD RACKS

- **Material:** Special design, natural finish, high strength, extruded aluminum (6063-T6 alloy).
- **Rugged:** Double-riveted aircraft construction throughout.
- **Pass-Thru Design:** Can be loaded on one side and unloaded from the other for maximum efficiency and convenience.
- **Lightweight:** Easy to handle. Freewheeling.
- **Sanitary:** Easy cleaning.
- **Rapid Cooling**
- **Ideal** for freezer operations, refrigerator use, bakeries, commissaries.

Note: Wood grain vinyl aluminum enclosure panels are available. Completely removable without tools. See accessories.

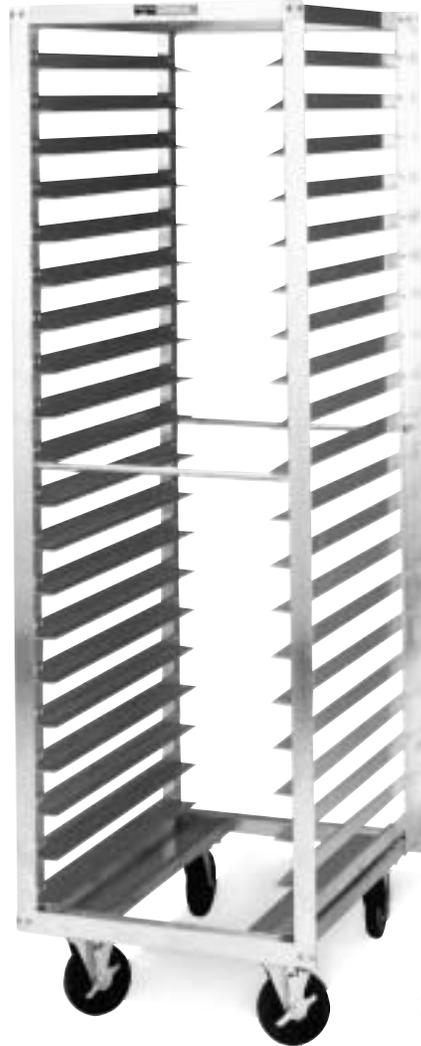

RD3N



InterMetro Industries Corporation
North Washington Street
Wilkes-Barre, PA 18705
www.metro.com

Copyright © 2000 InterMetro Industries Corp.



METRO® MOBILE
End Load Racks Single Section/Model RD Series

13.50




METRO® MOBILE END LOAD RACKS

Specifications

- **Material:** Special design, natural finish, high strength, extruded aluminum (6063-T6 alloy).
- **Construction:** Pass-thru design, aircraft-riveted construction throughout.
- **Corner Posts:** 1 1/2"x1 1/2"x1/8" (38x38x3.1mm) angle-shaped.
- **Top & Bottom:** 1 1/2"x1 1/2"x1/8" (38x38x3.1mm) angle-shaped riveted to four corner posts.
- **Casters:** Two A5L – 5" (127mm) ball bearing swivel, self-lubricating axle, rubber-wheeled, zinc-plated, bolted to full-length, 14-gauge channel bottom frame. Two A5LB – same as above with wheel brake.
- **Slides 3" (76mm) & 5" (127mm) Spacing:** .060"x1 1/4"x1 1/2" (1.5x32x38mm) bulb-tipped angle, double-riveted to posts. RD15N and RD25N – .080"x1 1/4"x3" (2.0x32x76mm).
- **Slides 1 1/2" (38mm) Spacing:** .060"x1 1/2"x1 1/2" (1.5x12.7x38mm) bulb-tipped, extruded channel double-riveted to posts.

Note: Racks 60" (1524mm) and higher have 1/2" (12.7mm) diameter stabilizer rods at center of each end.

LOAD RATINGS: 20 lbs. (9kg) per level, or not to exceed 375 lbs. (170kg) per unit.

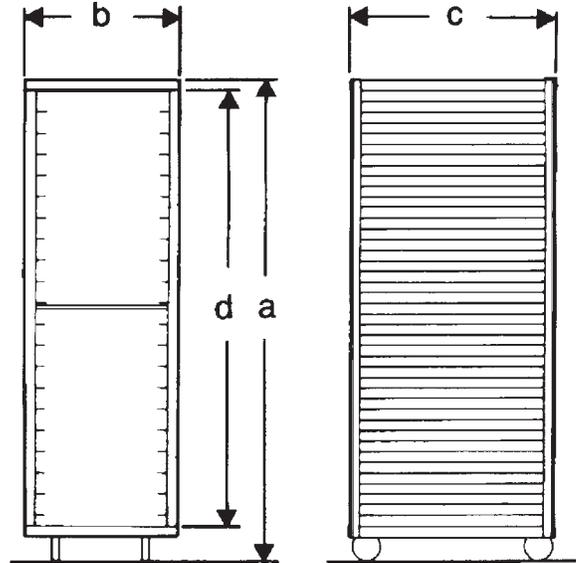

Dimensions

Cat. No.	(a) (b) (c) Height/Width/Depth		(d) Inside Height		Slide Spacing		Pan Capacity		Shipping Weight	
	(in.)	(mm)	(in.)	(mm)	(in.)	(mm)	No.	Size (in.)	(lbs.)	(kg)
RD3N	69 1/4 x 21 1/2 x 29	1759 x 545 x 735	60 1/2	1535	3	76	20 or 40	18x26 14x18 Pans	52	23
RD13N	69 1/4 x 21 1/4 x 26 1/2	1759 x 545 x 670	60 1/2	1535	1 1/2	38	40	18x26 Pans	52	23
RD15N	63 1/4 x 20 x 23	1606 x 510 x 585	54 1/2	1385	3	76	18 or 18	15x20 16x22 Trays	49	22
RD23N	69 1/4 x 21 1/2 x 29	1759 x 545 x 735	60 1/2	1535	5	127	12 or 24	18x26 14x18 Pans	45	20

Accessories

Model	Description
A33RD	Gray Continuous Bumper
A37	Gray Corner Bumper
A71	Floor Lock (for use with B5DN/B5DND casters only)
A120	Pan Stop

Wood Grain Enclosures

(fits Models RD3N & RD23N only)

Model	Description	Shipping Weight	
		(lbs.)	(kg)
A200	Complete Enclosure Kit (includes: 2 Sides, 1 Back, 1 Top)	31	14
A201	2 Side Panels only	20	9
A202	1 Back Panel only	7	3
A203	Top Panel only	4	2

Manufactured by:



InterMetro Industries Corporation

North Washington Street, Wilkes-Barre, PA 18705

Phone: 570-825-2741 • Fax: 570-825-2852

For Product Information Call: 1-800-433-2232

Visit Our Web Site: www.metro.com

L02-075
Rev. 9/00
Printed in U.S.A.

Information and specifications are subject to change without notice. Please confirm at time of order.

