



# REACH-IN BOTTOM-MOUNT SERIES FREEZERS GLASS DOORS

## Features

- CFC free refrigerant and foam insulation
- Electronic thermostat and digital LED temperature display for accurate control and easy reading
- 4 adjustable, heavy-duty epoxy coated wire shelves per door
- Clip-on shelf tag holders
- Condensate heating element built in door frame to eliminate condensation
- Easy to mount 4" casters (lockable in front) are standard with all units
- Self-closing doors that remain open at 90 degrees
- Locking doors on all units
- Magnetic gasket can be replaced without any tools
- Exterior: 430 stainless steel, door & front panel: 202 stainless steel
- Interior: 304 stainless steel
- Refrigerant: R-290 Natural refrigerant
- Temperature: 0 to 10°F / -17 to -23°C
- Electrical: 115/60/1 with NEMA 5-15P plug, 10ft cord



NEMA  
5-15P



IB27FG



IB54FG

## Specifications

DESIGNED TO OPERATE IN AMBIENT TEMPERATURES BETWEEN 40F-90F FOR OPTIMUM PERFORMANCE.



Certified to ANSI/NSF-7 Standards

Model	Doors	Ext. Dimensions W X D X H (In)	Int.. Dimensions W X D X H (In)	Amps	H.P	Ship Weight
IB27FG	1	26.8 X 33.1 X 83.1	22.2 X 27.7 X 59.4	8	1/2	366 lbs
IB54FG	2	53.9 X 33.7 X 82.7	49.4 X 27.8 X 59.7	9	1	598 lbs




# REACH-IN BOTTOM-MOUNT SERIES FREEZERS GLASS DOORS



Certified to ANSI/NSF-7 Standards

Dimensions in inches (mm)

IB27FG

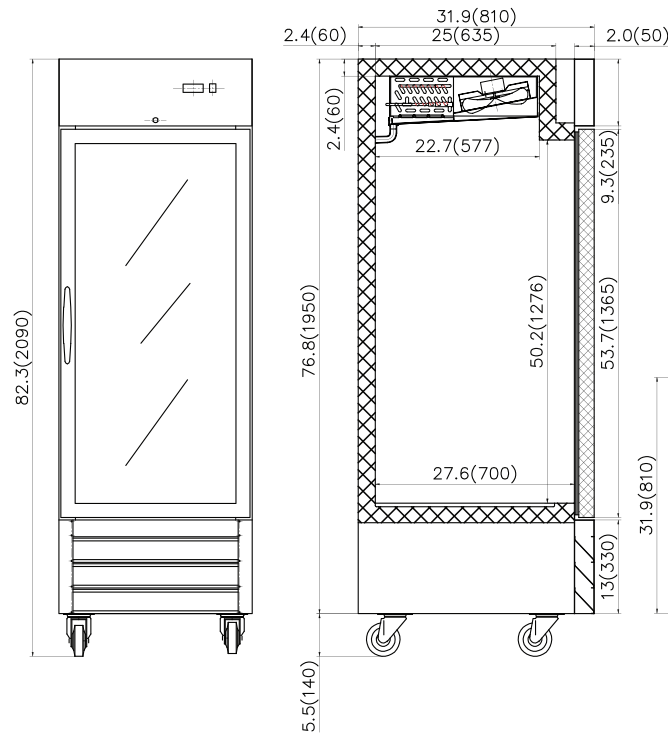

IB54FG

