


The 365 Pastry Display Case/Showcase, features (3) lengths: 43.08", 63.74", 84.41" with (1) or (2) shelves, & pull out drawer. It has self-contained, air cooled refrigeration, humidity control, tempered heated double pane glass front & sides, hydraulic tilt back front glass, rear plexiglass sliding doors. It has front lower glass facia (glass is back painted), digital diagnostic control with programmable defrosting, LED lighting, 304 high gloss stainless steel interior, stainless steel construction, & a service merchandiser.



365-RVS30A-C-55-A&B

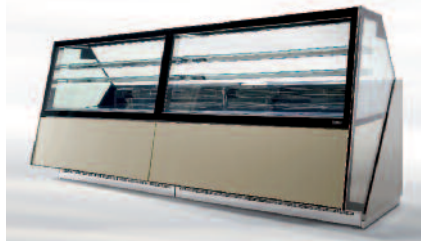

365-RVC4M-P-55-84

Model No.	Application	Description	Height	Length	Depth	Crated Weight	Voltage	Amps	HP
365-RVC2M-P-49-43	Pastry	Refrigerated deck, one non refrigerated shelf, and one drawer	49.25"	43.08"	47.44"	875#	220/60/1	12	1/3 HP
365-RVC2M-P-55-43	Pastry	Refrigerated deck, two non refrigerated shelves, and one drawer	55.25"	43.08"	47.44"	875#	220/60/1	12	1/3 HP
365-RVC3M-P-49-64	Pastry	Refrigerated deck, one non refrigerated shelf, and two drawers	49.25"	63.74"	47.44"	723#	220/60/1	14	1/2 HP
365-RVC3M-P-55-64	Pastry	Refrigerated deck, two non refrigerated shelves, and two drawers	55.25"	63.74"	47.44"	723#	220/60/1	14	1/2 HP
365-RVC4M-P-49-84	Pastry	Refrigerated deck, one non refrigerated shelf, and two drawers	49.25"	84.41"	47.44"	934#	220/60/1	15	3/4 HP
365-RVC4M-P-55-84	Pastry	Refrigerated deck, two non refrigerated shelves, and two drawers	55.25"	84.41"	47.44"	934#	220/60/1	15	3/4 HP
365-RVS30A-P-49-A&B	Curved Pastry	Refrigerated deck and one non refrigerated shelf	49.25"	A & B	47.44"	723#	220/60/1	12	1/3 HP
365-RVS30A-P-55-A&B	Curved Pastry	Refrigerated deck and two non refrigerated shelves	55.25"	A & B	47.44"	875#	220/60/1	12	1/3 HP
365-RVS30C-P-49-A&B	Curved Pastry	Refrigerated deck and one non refrigerated shelf	49.25"	A & B	47.44"	934#	220/60/1	14	1/3 HP
365-RVS30C-P-55-A&B	Curved Pastry	Refrigerated deck and two non refrigerated shelves	55.25"	A & B	47.44"	723#	220/60/1	14	1/3 HP
365-RVS45A-P-49-A&B	Curved Pastry	Refrigerated deck and one non refrigerated shelf	49.25"	A & B	47.44"	875#	220/60/1	15	1/3 HP
365-RVS45A-P-55-A&B	Curved Pastry	Refrigerated deck and two non refrigerated shelves	55.25"	A & B	47.44"	934#	220/60/1	15	1/3 HP

Features


- An Innovative "All Season Convertible" Model
- Back Painted Front Glass Fascia in RAL Color Options
- Low Temp to Medium Temp Conversion Capability, with Retractable Glass Shelves
- Available in Linear, 30 and 45 Degrees Curved Designs
- Two Height Profile Options: 49.25" and 55.25"
- Low Profile Pan Display on Gelato/Ice Cream Application
- Tempered Double Pane Front and Side Glass
- Hydraulic Tilt Back Front Glass
- Self-Contained, Air Cooled Condensing Unit
- Galvanized Steel Chassis Construction
- Insulated / Non-Cfc Ecologic Polyurethane Foam

- Inside Structure / High Gloss 304 Stainless Steel
- Tempered, Double Pane Glass
- Hydraulic Tilt-Back Front Glass
- Rear, Plexiglass Sliding Doors
- Standard Silver Lacquered Side Panels
- Multiplexing Capability
- Temperature Range: +38° to +41°


Optional Features

- Rear Sliding Double Pane Glass Doors
- Casters
- Granite Work Surface (Operator Side)
- RAL Custom Color Options


SIDE VIEW
49.25" High

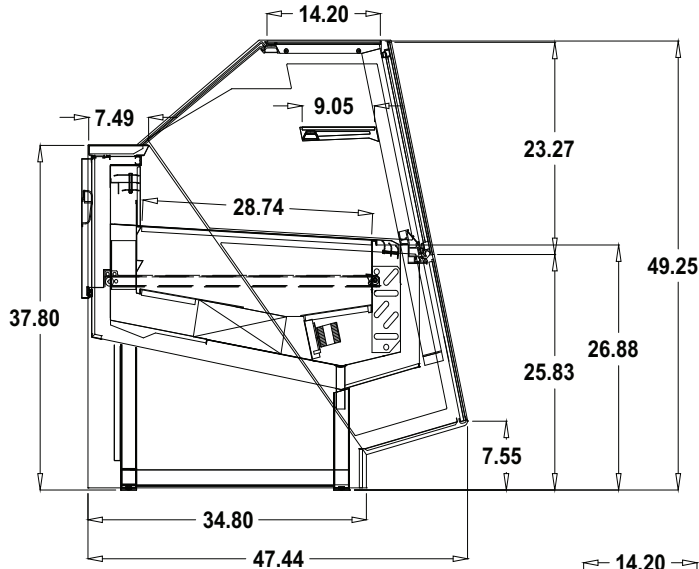


SIDE VIEW
55.25" High

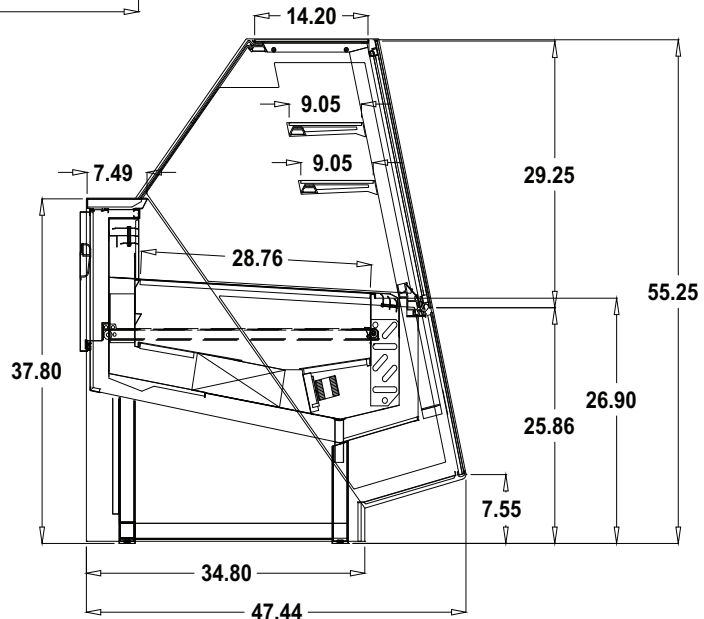



PLAN VIEW





PLAN VIEW

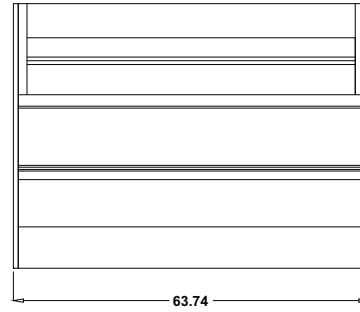



REAR VIEW





REAR VIEW

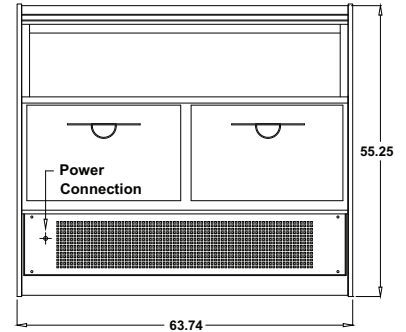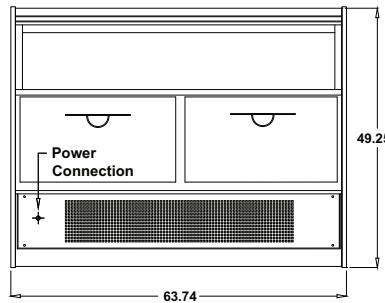

FRONT VIEW



FRONT VIEW

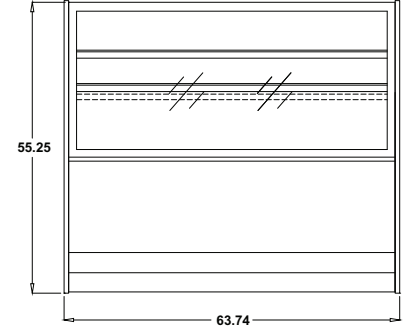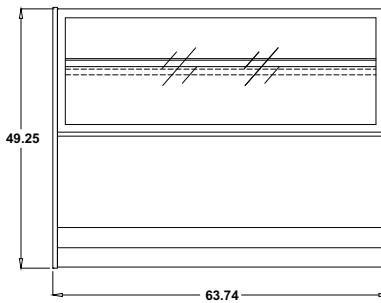


Required pastry conditions:
 75°F; 55% Relative Humidity
 Drawings and Specification are subject to change without notice.





ELECTRICAL CONNECTION:
 Display cases are shipped with applicable junction box for hardwired installation
 Options exist for several NEMA configurations
 Plug and/or receptacle configurations are at the discretion of the electrical installer

Product Specification Sheet
Model Style: 365 - Pastry
 84.41" Length - Plan Views, Rear View, Front Views


PLAN VIEW

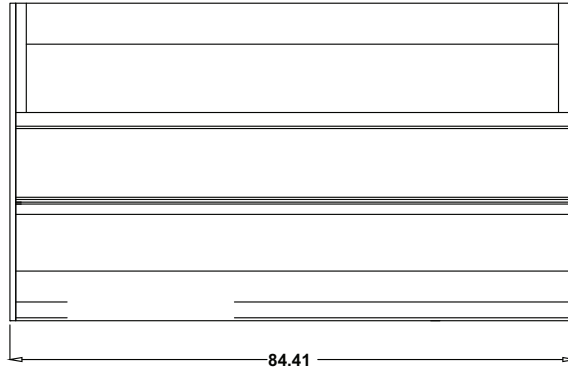

REAR VIEW

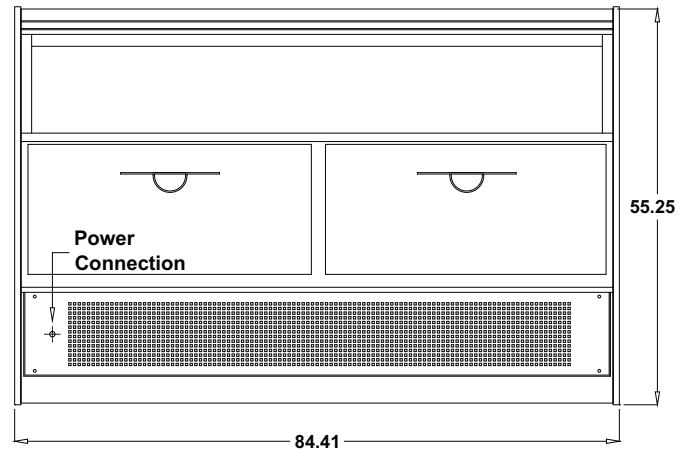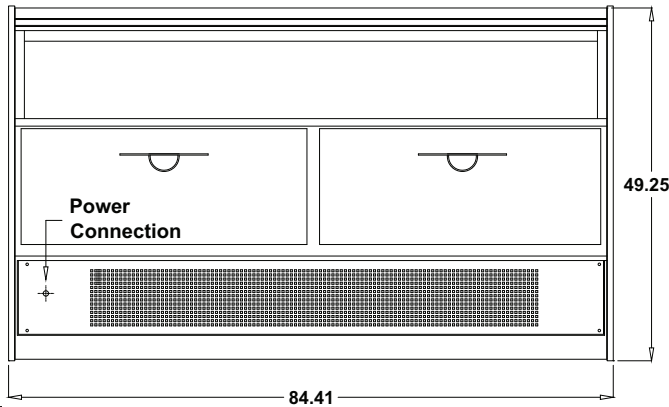

FRONT VIEW

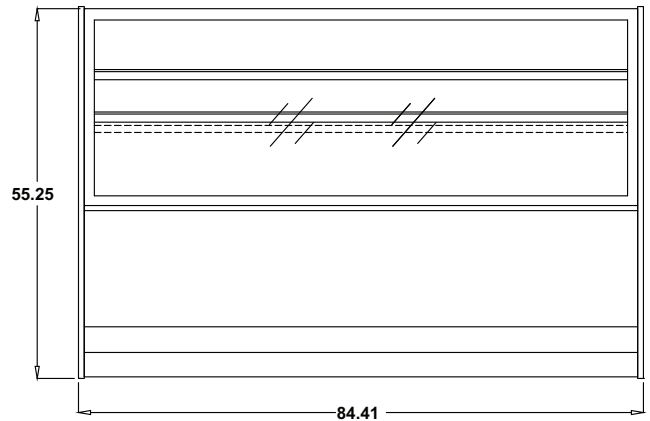


Required pastry conditions: 75°F; 55% Relative Humidity
 Drawings and Specification are subject to change without notice.




ELECTRICAL CONNECTION:
 Display cases are shipped with applicable junction box for hardwired installation
 Options exist for several NEMA configurations
 Plug and/or receptacle configurations are at the discretion of the electrical installer

A30

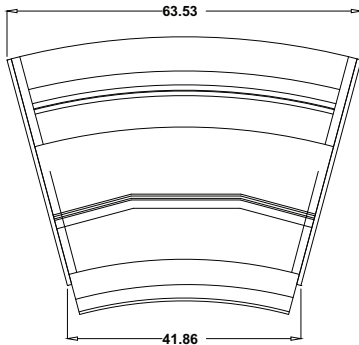


PLAN VIEW


C30

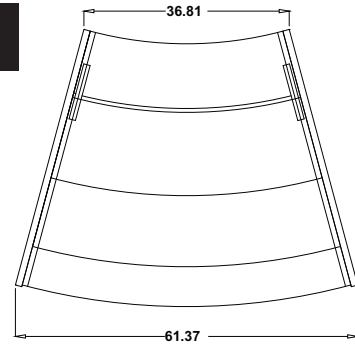

PLAN VIEW

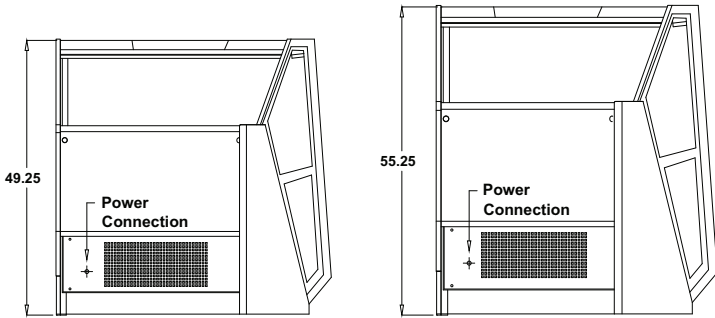


REAR VIEW

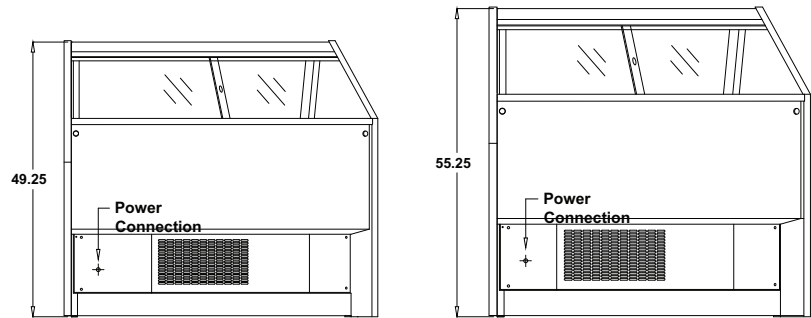


REAR VIEW

A45



PLAN VIEW

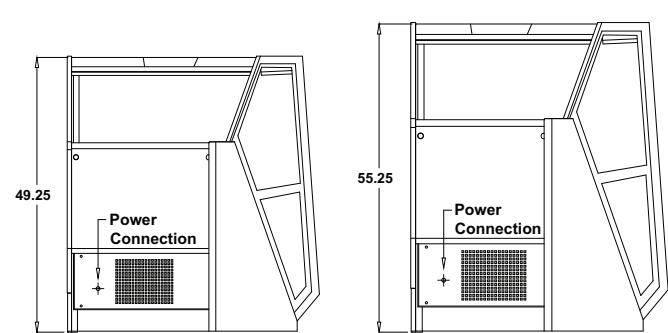

REAR VIEW



Intertek

Required pastry conditions: 75°F; 55% Relative Humidity
 Drawings and Specification are subject to change without notice.



Intertek

ELECTRICAL CONNECTION:
 Display cases are shipped with applicable junction box for hardwired installation
 Options exist for several NEMA configurations
 Plug and/or receptacle configurations are at the discretion of the electrical installer