

DESIGNER LINE ROLL-IN FREEZER (0°F)

Model: DL2FI-E

Designer Line

2-Section Extra-High Roll-In Freezer with 72" Cart Capacity

DL2FI-E - Stainless steel front, aluminum end panels and interior
DL2FI-SA-E - Stainless steel exterior, aluminum interior
DL2FI-SS-E - Stainless steel exterior and interior



Options and Accessories

(upcharge and lead times may apply)

Stainless steel case back	Increased refrigeration systems
Epoxy-coated steel shelves	Special electrical req. (consult factory)
Chrome or stainless steel shelves	Correctional Facility Options
Rehinging of doors (consult factory)	<ul style="list-style-type: none"> One way security screws
Expansion valve system	<ul style="list-style-type: none"> Locking hasp (lock not included)
Custom laminates	<ul style="list-style-type: none"> Stainless steel mesh cover
Half doors	<ul style="list-style-type: none"> Coverless hinges

Consult factory for other model configurations, options and accessories.

Project Name:

Model Specified:

Location:

Item No:

Quantity:

AIA #:

SIS #:

Standard Model Features

REFRIGERATION SYSTEM

Self contained, performance-rated "plug" refrigeration system

Environmentally-safe R-404A refrigerant

Refrigeration system is accessible on top of cabinet, separate from the "food zone"

Top and side air distribution ducts

Automatic, hot gas condensate evaporator

CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation

Smooth, polished chrome workflow door handles

Cam action, lift off hinges

Magnetic snap-in door gaskets

Cylinder lock in each door

Self-closing doors

72 1/2" high door openings (72"H rack capacity*)

MODEL FEATURES

LED interior lighting

Electronic controller w/digital display & hi-low alarm

Removable stainless steel rack guides

Removable stainless steel ramp

Reinforced stainless steel floor

Automatic electric defrost

* Rack not supplied

IMPORTANT NOTE: Cabinet upper side panels and refrigeration "plug" system can be removed and reinstalled at installation site where space limitations are confining.

Continental
Refrigerator

Toll-Free: 800-523-7138
 Phone: 215-244-1400
 Fax: 215-244-9579

539 Dunksferry Road
 Bensalem, PA 19020
www.continentalrefrigerator.com

APPROVAL:

Model Specifications

DIMENSIONAL DATA

Net Capacity (cu. ft.)	68 (1926 cu l)
Width, Overall (in.)	68 1/2 (1740 mm)
Depth, Overall (in.) (incl. handles)	35 3/8 (899 mm)
Depth (in.) (less doors)	32 (813 mm)
Depth (in.) (doors open 90°)	65 (1651 mm)
Clear Door Width (in.)	27 3/8 (695 mm)
Clear Full Door Height (in.)	72 1/2 (1842 mm)
Height, Overall (in.)	92 (2337 mm)
No. of Door(s)	2
Rack Capacity**	2

REFRIGERANT DATA

Condensing Unit Size (H.P.)	1
Capacity (BTU/Hr)*	4150

* Rating @ -15°F evaporator, 90°F ambient

ELECTRICAL DATA



Voltage (int'l)	115/208-230/60/1 (220/50/1)
Feed Wires (incl. ground)	4
Total Amps (int'l)	13.5 (10.8)
Defrost Amps (int'l)	9.6 (4.8)
10 ft. Cord/Plug (int'l)	No (No)

SHIPPING DATA

Height - Crated (in.)	97 (2464 mm)
Width - Crated (in.)	77 (1956 mm)
Depth - Crated (in.)	42 (1067 mm)
Volume - Crated (cu. ft.)	176 (4984 cu l)
Weight Std - Crated (lbs.)	750 (340 kg)
Weight SS - Crated (lbs.)	910 (413 kg)

** Maximum rack size including wheels - 27"W x 29"D x 72"H
Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.

Model Plan Views

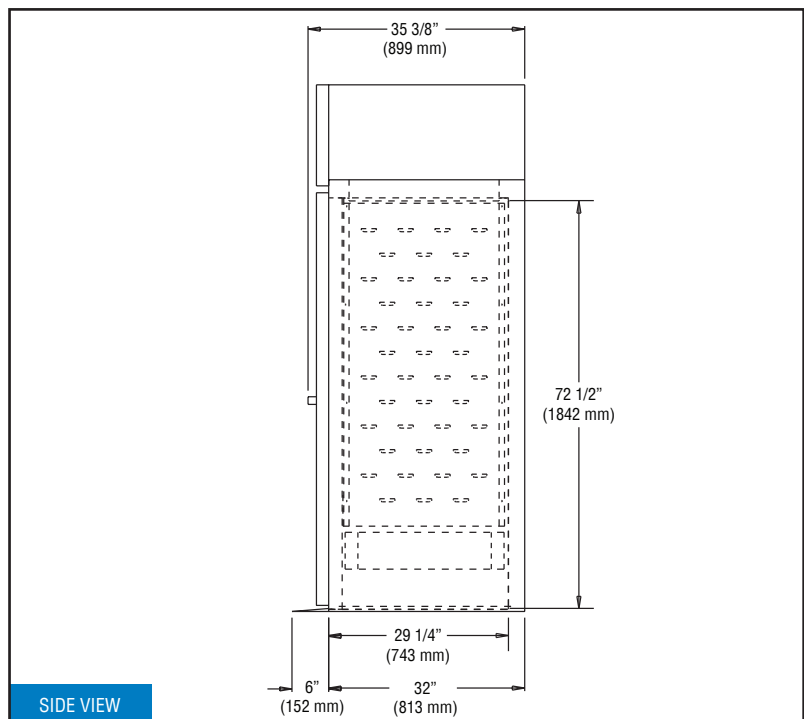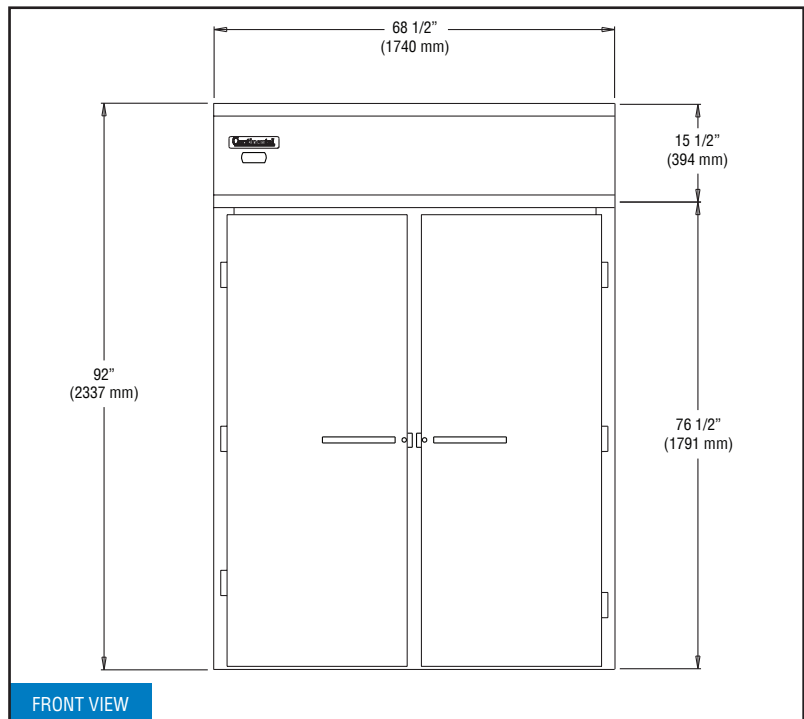

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a minimum clearance of 12" is required on top and 3" on sides and rear.

Continental
Refrigerator

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

539 Dunkserry Road
Bensalem, PA 19020
www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.



MADE IN THE U.S.A.

© Copyright 2020. Continental Refrigerator.
A Division of National Refrigeration & Air Conditioning Products, Inc.