

DESIGNER LINE ROLL-IN FREEZER

Model: DL2FI

Designer Line

2-Section Roll-In Freezer with 66 1/4" Cart Capacity

DL2FI - Stainless steel front, aluminum end panels and interior
DL2FI-SA - Stainless steel exterior, aluminum interior
DL2FI-SS - Stainless steel exterior and interior



Options and Accessories

(upcharge and lead times may apply)

Stainless steel case back	Hinged glass doors
Epoxy-coated steel shelves	Increased refrigeration systems
Chrome or stainless steel shelves	Special electrical req. (consult factory)
Rehinging of doors (consult factory)	Correctional Facility Options
Expansion valve system	• One way security screws
Custom laminates	• Locking hasp (lock not included)
Half doors	• Stainless steel mesh cover
Roll-Thru	• Coverless hinges

Consult factory for other model configurations, options and accessories.

Continental[®]
Refrigerator

Toll-Free: 800-523-7138
 Phone: 215-244-1400
 Fax: 215-244-9579

539 Dunksferry Road
 Bensalem, PA 19020
www.continentalrefrigerator.com

Project Name:

Model Specified:

Location:

Item No:

Quantity:

AIA #:

SIS #:

Standard Model Features

REFRIGERATION SYSTEM

Self contained, performance-rated "plug" refrigeration system
 Environmentally-safe R-404A refrigerant
 Refrigeration system is accessible on top of cabinet, separate from the "food zone"
 Top and side air distribution ducts
 Automatic, hot gas condensate evaporator

CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation
 Smooth, polished chrome workflow door handles
 Cam action, lift off hinges
 Magnetic snap-in door gaskets
 Cylinder lock in each door
 Self-closing doors
 66 1/2" high door openings (66 1/4"H rack capacity*)

MODEL FEATURES

LED interior lighting
 Electronic controller w/digital display & hi-low alarm
 Removable stainless steel rack guides
 Removable stainless steel ramps
 Reinforced stainless steel floor
 Automatic electric defrost

* Rack not supplied

IMPORTANT NOTE: Cabinet upper side panels and refrigeration "plug" system can be removed and reinstalled at installation site where space limitations are confining.

APPROVAL:

Model Specifications

DIMENSIONAL DATA

Net Capacity (cu. ft.)	64 (1812 cu l)
Width, Overall (in.)	68 1/2 (1740 mm)
Depth, Overall (in.) (incl. handles)	35 3/8 (899 mm)
Depth (in.) (less doors)	32 (813 mm)
Depth (in.) (doors open 90°)	65 (1651 mm)
Clear Door Width (in.)	27 3/8 (695 mm)
Clear Full Door Height (in.)	66 1/2 (1676 mm)
Height, Overall (in.)	86 (2184 mm)
No. of Door(s)	2
Rack Capacity**	2

REFRIGERANT DATA

Condensing Unit Size (H.P.)	1
Capacity (BTU/Hr)*	4150

ELECTRICAL DATA

Voltage (int'l)	115/208-230/60/1 (220/50/1)
Feed Wires (incl. ground)	4
Total Amps (int'l)	13.5 (10.8)
Defrost Amps (int'l)	9.6 (4.8)
10 ft. Cord/Plug (int'l)	No (No)

SHIPPING DATA



Height - Crated (in.)	90 (2286 mm)
Width - Crated (in.)	77 (1956 mm)
Depth - Crated (in.)	42 (1067 mm)
Volume - Crated (cu. ft.)	168 (4757 cu l)
Weight Std - Crated (lbs.)	730 (331 kg)
Weight SS - Crated (lbs.)	767 (348 kg)

* Rating @ -15°F evaporator, 90°F ambient

** Maximum rack size including wheels - 27"W x 29"D x 66 1/4"H

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.

Model Plan Views

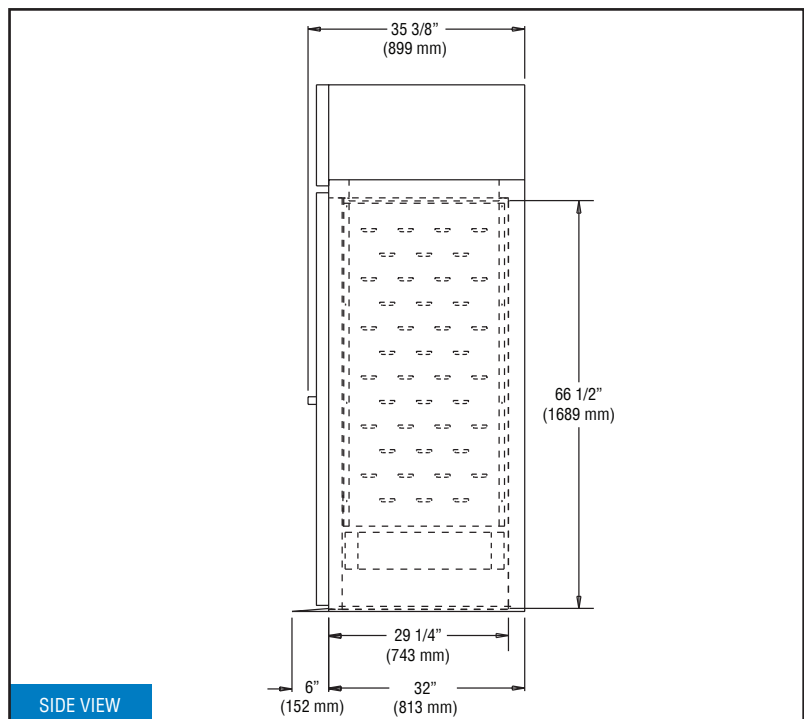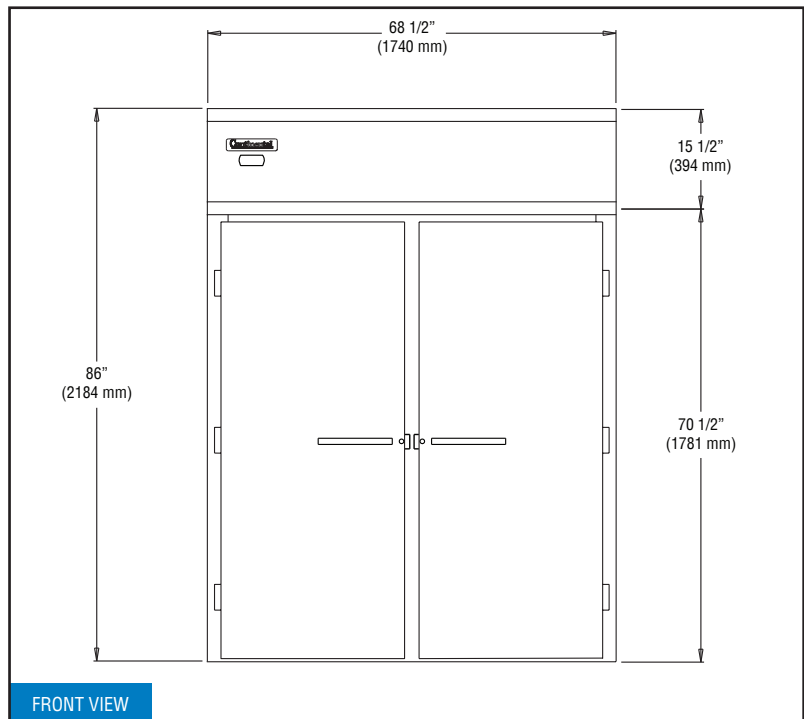

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a minimum clearance of 12" is required on top and 3" on sides and rear.

Continental
Refrigerator

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

539 Dunkserry Road
Bensalem, PA 19020
www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.



MADE IN THE U.S.A.

© Copyright 2019, Continental Refrigerator.
A Division of National Refrigeration & Air Conditioning Products, Inc.